

# Rosemount 3051 Pressure Transmitter

## **THE PROVEN INDUSTRY LEADER IN PRESSURE MEASUREMENT**

- *Best-in-Class performance with up to 0.04% reference accuracy*
- *Industry first installed five-year stability*
- *Unmatched Dynamic Performance*
- *Coplanar™ platform enables integrated pressure, flow, and level solutions*
- *Advanced PlantWeb® Functionality to increase plant productivity*



## **Contents**

Setting the Standard for Pressure Measurement. . . . .	page 2
Ordering Information	
Rosemount 3051C Coplanar Pressure Transmitter. . . . .	page 3
Rosemount 3051T In-Line Pressure Transmitter. . . . .	page 10
Rosemount 3051CF Flowmeter Series . . . . .	page 14
Rosemount 3051L Liquid Level Transmitter . . . . .	page 29
Specifications. . . . .	page 35
Product Certifications. . . . .	page 44
Dimensional Drawings. . . . .	page 49

## Setting the Standard for Pressure Measurement



### Proven best-in-class performance, reliability and safety

- Over 4 million installed
- Meet your application needs with extensive offering
- Real world total performance of  $\pm 0.15\%$
- Reference accuracy of  $\pm 0.04\%$



Flow



Pressure



Level

### Maximize Installation Flexibility with Coplanar Platform

- Improve reliability and performance with integrated DP Flowmeters, DP Level and manifolds
- Easy installation with all solutions fully assembled, leak-tested and calibrated
- Meet your application needs with an unsurpassed offering



### Unlock the Value of Devices with the Smart Wireless THUM™ Adapter

- Gain access to field intelligence and improve quality, safety, availability, operations and maintenance costs
- Remotely manage devices and monitor health
- Enable new wireless measurement points
- Utilize existing loop power



### Innovative, Integrated DP Flowmeters

- Fully assembled and leak tested for out-of-the-box installation
- Reduce straight pipe requirements, lower permanent pressure loss and achieve accurate measurement in small line sizes
- Up to 1.65% volumetric flow accuracy at 8:1 turndown



### Proven, Reliable and Innovative DP Level Technologies

- Connect to virtually any process with a comprehensive offering of process connections, fill fluids, direct mount or capillary connections and materials
- Quantify and optimize total system performance with QZ option
- Operate at higher temperature and in vacuum applications
- Optimize level measurement with cost efficient Tuned-System™ Assemblies



### Instrument Manifolds – Quality, Convenient, and Easy

- Design and engineered for optimal performance with Rosemount transmitters
- Save installation time and money with factory assembly
- Offers a variety of styles, materials and configurations

## Rosemount 3051C Coplanar Pressure Transmitter



**3051C Coplanar  
Pressure Transmitter**

Industry's best total performance, a flexible Coplanar platform, and installed five-year stability has made Rosemount 3051 the standard for Differential, Gage, and Absolute pressure measurement. Select from the following capabilities for seamless integration:

- Performance up to 0.04% accuracy
- Manifolds, Primary Elements and Seal Solutions
- 4-20 mA HART, 1-5 Vdc HART low power, FOUNDATION fieldbus, and Profibus PA protocols
- Calibrated spans/ranges from 0.1 inH<sub>2</sub>O to 4000 psi (0,25 mbar to 276 bar)
- 316 SST, Alloy C-276, Alloy 400, Tantalum, Gold-Plated Alloy 400 or 316L SST wetted materials

### Additional Information

Specifications: page 35

Certifications: page 44

Dimensional Drawings: page 49

Table 1. 3051C Coplanar Pressure Transmitters Ordering Information

★ The Standard offering represents the most common options. The starred options (★) should be selected for best delivery. The Expanded offering is subject to additional delivery lead time.

Model	Transmitter Type			
3051C	Coplanar Pressure Transmitter			
<b>Measurement Type</b>				
<b>Standard</b>				<b>Standard</b>
D	Differential			★
G	Gage			★
<b>Expanded</b>				
A	Absolute			
<b>Pressure Range</b>				
	<b>3051CD</b>	<b>3051CG</b>	<b>3051CA</b>	
<b>Standard</b>				<b>Standard</b>
1	-25 to 25 inH <sub>2</sub> O (-62.2 to 62.2 mbar)	-25 to 25 inH <sub>2</sub> O (-62,1 to 62.2 mbar)	0 to 30 psia (0 to 2.1 bar)	★
2	-250 to 250 inH <sub>2</sub> O (-623 to 623 mbar)	-250 to 250 inH <sub>2</sub> O (-621 to 623 mbar)	0 to 150 psia (0 to 10.3 bar)	★
3	-1000 to 1000 inH <sub>2</sub> O (-2.5 to 2.5 bar)	-393 to 1000 inH <sub>2</sub> O (-0.98 to 2.5 bar)	0 to 800 psia (0 to 55.2 bar)	★
4	-300 to 300 psi (-20.7 to 20.7 bar)	-14.2 to 300 psi (-0.98 to 20.7 bar)	0 to 4000 psia (0 to 275.8 bar)	★
5	-2000 to 2000 psi (-137.9 to 137.9 bar)	-14.2 to 2000 psi (-0.98 to 137.9 bar)	Not Applicable	★
<b>Expanded</b>				
0 <sup>(1)</sup>	-3 to 3 inH <sub>2</sub> O (-7.5 to 7.5 mbar)	Not Applicable	Not Applicable	
<b>Transmitter Output</b>				
<b>Standard</b>				<b>Standard</b>
A	4-20 mA with Digital Signal Based on HART Protocol			★
F	FOUNDATION fieldbus Protocol			★
W <sup>(2)</sup>	Profibus PA Protocol			★

# Rosemount 3051

Table 1. 3051C Coplanar Pressure Transmitters Ordering Information

★ The Standard offering represents the most common options. The starred options (★) should be selected for best delivery.  
The Expanded offering is subject to additional delivery lead time.

<b>Expanded</b>				
M	Low-Power, 1–5 V dc with Digital Signal Based on HART Protocol (See Option C2 for 0.8–3.2 V dc)			
<b>Materials of Construction</b>				
	Process Flange Type	Flange Material	Drain/Vent	
<b>Standard</b>				<b>Standard</b>
2	Coplanar	SST	SST	★
3 <sup>(3)</sup>	Coplanar	Cast C-276	Alloy C-276	★
4	Coplanar	Cast Alloy 400	Alloy 400/K-500	★
5	Coplanar	Plated CS	SST	★
7 <sup>(3)</sup>	Coplanar	SST	Alloy C-276	★
8 <sup>(3)</sup>	Coplanar	Plated CS	Alloy C-276	★
0	Alternate Process Connection			★
<b>Isolating Diaphragm</b>				
<b>Standard</b>				<b>Standard</b>
2 <sup>(3)</sup>	316L SST			★
3 <sup>(3)</sup>	Alloy C-276			★
<b>Expanded</b>				
4	Alloy 400			
5	Tantalum (Available on 3051CD and CG, Ranges 2–5 only. Not available on 3051CA)			
6	Gold-plated Alloy 400 (Use in combination with O-ring Option Code B.)			
7	Gold-plated SST			
<b>O-ring</b>				
<b>Standard</b>				<b>Standard</b>
A	Glass-filled PTFE			★
B	Graphite-filled PTFE			★
<b>Sensor Fill Fluid</b>				
<b>Standard</b>				<b>Standard</b>
1	Silicone			★
2	Inert (Differential and Gage only)			★
<b>Housing Material</b>			<b>Conduit Entry Size</b>	
<b>Standard</b>				<b>Standard</b>
A	Aluminum		½–14 NPT	★
B	Aluminum		M20 × 1.5	★
J	SST		½–14 NPT	★
K	SST		M20 × 1.5	★
<b>Expanded</b>				
D	Aluminum		G½	
M	SST		G½	

## Options (Include with selected model number)

<b>Plantweb Control Functionality</b>				
<b>Standard</b>				<b>Standard</b>
A01	FOUNDATION fieldbus Advanced Control Function Block Suite			★
<b>Plantweb Diagnostic Functionality</b>				
<b>Standard</b>				<b>Standard</b>
D01	FOUNDATION fieldbus Diagnostics Suite			★

# Product Data Sheet

00813-0100-4001, Rev LA

November 2010

# Rosemount 3051

Table 1. 3051C Coplanar Pressure Transmitters Ordering Information

★ The Standard offering represents the most common options. The starred options (★) should be selected for best delivery.

The Expanded offering is subject to additional delivery lead time.

<b>Alternate Flange<sup>(4)</sup></b>		
<b>Standard</b>		<b>Standard</b>
H2	Traditional Flange, 316 SST, SST Drain/Vent	★
H3 <sup>(3)</sup>	Traditional Flange, Alloy C, Alloy C-276 Drain/Vent	★
H4	Traditional Flange, Cast Alloy 400, Alloy 400/K-500 Drain/Vent	★
H7 <sup>(3)</sup>	Traditional Flange, 316 SST, Alloy C-276 Drain/Vent	★
HJ	DIN Compliant Traditional Flange, SST, 1/16 in. Adapter/Manifold Bolting	★
FA	Level Flange, SST, 2 in., ANSI Class 150, Vertical Mount	★
FB	Level Flange, SST, 2 in., ANSI Class 300, Vertical Mount	★
FC	Level Flange, SST, 3 in., ANSI Class 150, Vertical Mount	★
FD	Level Flange, SST, 3 in., ANSI Class 300, Vertical Mount	★
FP	DIN Level Flange, SST, DN 50, PN 40, Vertical Mount	★
FQ	DIN Level Flange, SST, DN 80, PN 40, Vertical Mount	★
<b>Expanded</b>		
HK <sup>(5)</sup>	DIN Compliant Traditional Flange, SST, 10 mm Adapter/Manifold Bolting	
HL	DIN Compliant Traditional Flange, SST, 12mm Adapter/Manifold Bolting (Not available on 3051CD0)	
<b>Manifold Assembly<sup>(5)(9)</sup></b>		
<b>Standard</b>		<b>Standard</b>
S5	Assemble to Rosemount 305 Integral Manifold	★
S6	Assemble to Rosemount 304 Manifold or Connection System	★
<b>Integral Mount Primary Element<sup>(5)(9)</sup></b>		
<b>Standard</b>		<b>Standard</b>
S4 <sup>(6)</sup>	Assemble to Rosemount Annubar or Rosemount 1195 Integral Orifice	★
S3	Assemble to Rosemount 405 Compact Orifice Plate	★
<b>Seal Assemblies<sup>(9)</sup></b>		
<b>Standard</b>		<b>Standard</b>
S1 <sup>(7)</sup>	Assemble to one Rosemount 1199 seal	★
S2 <sup>(8)</sup>	Assemble to two Rosemount 1199 seals	★
<b>All-Welded Seal Assemblies (for high vacuum applications)<sup>(9)</sup></b>		
<b>Standard</b>		<b>Standard</b>
S0	One Seal, All-Welded System (Direct Mount Connection Type)	★
S7	One Seal, All-Welded System (Capillary Connection Type)	★
S8	Two Seals, All-Welded System (Capillary Connection Type)	★
S9	Two Seals, All-Welded System (One Direct Mount and One Capillary Connection Type)	★
<b>Mounting Bracket</b>		
<b>Standard</b>		<b>Standard</b>
B1	Traditional Flange Bracket for 2-in. Pipe Mounting, CS Bolts	★
B2	Traditional Flange Bracket for Panel Mounting, CS Bolts	★
B3	Traditional Flange Flat Bracket for 2-in. Pipe Mounting, CS Bolts	★
B4	Coplanar Flange Bracket for 2-in. Pipe or Panel Mounting, all SST	★
B7	B1 Bracket with Series 300 SST Bolts	★
B8	B2 Bracket with Series 300 SST Bolts	★
B9	B3 Bracket with Series 300 SST Bolts	★
BA	SST B1 Bracket with Series 300 SST Bolts	★
BC	SST B3 Bracket with Series 300 SST Bolts	★

# Rosemount 3051

Table 1. 3051C Coplanar Pressure Transmitters Ordering Information

★ The Standard offering represents the most common options. The starred options (★) should be selected for best delivery.  
The Expanded offering is subject to additional delivery lead time.

<b>Product Certifications</b>		
<b>Standard</b>		<b>Standard</b>
C6	CSA Explosion-proof, Dust Ignition-proof, Intrinsically Safe, and Division 2	★
E2 <sup>(11)</sup>	INMETRO Flameproof	★
E3 <sup>(11)</sup>	China Flameproof	★
E4 <sup>(10)</sup>	TIIS Flame-proof	★
E5	FM Explosion-proof, Dust Ignition-Proof	★
E7 <sup>(11)</sup>	IECEX Flameproof, Dust Ignition-proof	★
E8	ATEX Flameproof and Dust Certification	★
I1 <sup>(11)</sup>	ATEX Intrinsic Safety and Dust	★
I2 <sup>(11)</sup>	INMETRO Intrinsic Safety	★
I3	China Intrinsic Safety	★
I4 <sup>(12)</sup>	TIIS Intrinsic Safety	★
I5	FM Intrinsically Safe, Division 2	★
I7 <sup>(11)</sup>	IECEX Intrinsic Safety	★
IA	ATEX FISCO Intrinsic Safety; for FOUNDATION fieldbus protocol only	★
IE	FM FISCO Intrinsically Safe; for FOUNDATION fieldbus protocol only	★
K2 <sup>(11)</sup>	INMETRO Flameproof, Intrinsic Safety	★
K5	FM Explosion-proof, Dust Ignition-Proof, Intrinsically Safe, and Division 2	★
K6 <sup>(11)</sup>	CSA and ATEX Explosion-proof, Intrinsically Safe, and Division 2 (combination of C6 and K8)	★
K7 <sup>(11)</sup>	IECEX Flame-proof, Dust Ignition-proof, Intrinsic Safety, and Type n (combination of I7, N7, and E7)	★
K8 <sup>(11)</sup>	ATEX Flameproof, Intrinsic Safety, Type n, Dust (combination of E8, I1 and N1)	★
KB	FM and CSA Explosion-proof, Dust Ignition Proof, Intrinsically Safe, and Division 2 (combination of K5 and C6)	★
KD <sup>(11)</sup>	FM, CSA, and ATEX Explosion-proof, Intrinsically Safe (combination of K5, C6, I1, and E8)	★
N1 <sup>(11)</sup>	ATEX Type n Certification and Dust	★
N3	China Type n	★
N7 <sup>(11)</sup>	IECEX Type n Certification	★
<b>Drinking Water Approval</b>		
<b>Standard</b>		<b>Standard</b>
DW <sup>(13)</sup>	NSF drinking water approval	★
<b>Shipboard Approvals</b>		
<b>Standard</b>		<b>Standard</b>
SBS	American Bureau of Shipping	★
<b>Custody Transfer</b>		
<b>Standard</b>		<b>Standard</b>
C5 <sup>(16)</sup>	Measurement Canada Accuracy Approval ( <i>Limited availability depending on transmitter type and range. Contact an Emerson Process Management representative</i> )	★
<b>Bolting Material</b>		
<b>Standard</b>		<b>Standard</b>
L4	Austenitic 316 SST Bolts	★
L5	ASTM A 193, Grade B7M Bolts	★
L6	Alloy K-500 Bolts	★
<b>Display and Interface Options</b>		
<b>Standard</b>		<b>Standard</b>
M4 <sup>(14)</sup>	LCD Display with Local Operator Interface	★
M5	LCD Display for Aluminum Housing (Housing Codes A, B, C, and D only)	★
M6	LCD Display for SST Housing (Housing Codes J, K, L, and M only)	★

# Product Data Sheet

00813-0100-4001, Rev LA

November 2010

# Rosemount 3051

Table 1. 3051C Coplanar Pressure Transmitters Ordering Information

★ The Standard offering represents the most common options. The starred options (★) should be selected for best delivery.  
The Expanded offering is subject to additional delivery lead time.

<b>Calibration Certificate</b>		
<b>Standard</b>		<b>Standard</b>
Q4	Calibration Certificate	★
QG	Calibration Certificate and GOST Verification Certificate	★
QP	Calibration certification and tamper evident seal	★
<b>Material Traceability Certification</b>		
<b>Standard</b>		<b>Standard</b>
Q8	Material Traceability Certification per EN 10204 3.1.B	★
<b>Quality Certification for Safety</b>		
<b>Standard</b>		<b>Standard</b>
QS <sup>(15)</sup>	Prior-use certificate of FMEDA data	★
<b>Hardware Adjustments</b>		
<b>Standard</b>		<b>Standard</b>
J1 <sup>(16)(17)</sup>	Local Zero Adjustment Only	★
J3 <sup>(16)(17)</sup>	No Local Zero or Span Adjustment	★
<b>Transient Protection Terminal Block</b>		
<b>Standard</b>		<b>Standard</b>
T1 <sup>(18)</sup>	Transient Protection Terminal Block	★
<b>Software Configuration</b>		
<b>Standard</b>		<b>Standard</b>
C1 <sup>(16)</sup>	Custom Software Configuration (Completed CDS 00806-0100-4001 required with order)	★
<b>Low Power Output</b>		
<b>Expanded</b>		
C2	0.8–3.2 V dc Output with Digital Signal Based on HART Protocol (Output Code M only)	
<b>Gage Pressure Calibration</b>		
<b>Standard</b>		<b>Standard</b>
C3	Gage Calibration (Model 3051CA4 only)	★
<b>Alarm Limit</b>		
<b>Standard</b>		<b>Standard</b>
C4 <sup>(16)(19)</sup>	Analog Output Levels Compliant with NAMUR Recommendation NE 43, Alarm High	★
CN <sup>(16)(19)</sup>	Analog Output Levels Compliant with NAMUR Recommendation NE 43, Alarm Low	★
<b>Pressure Testing</b>		
<b>Expanded</b>		
P1	Hydrostatic Testing with Certificate	
<b>Cleaning Process Area</b>		
<b>Expanded</b>		
P2	Cleaning for Special Service	
P3	Cleaning for <1 PPM Chlorine/Fluorine	
<b>Pressure Calibration</b>		
<b>Expanded</b>		
P4	Calibrate at Line Pressure ( <i>Specify Q48 on order for corresponding certificate</i> )	
<b>Performance</b>		
<b>Standard</b>		<b>Standard</b>
P8 <sup>(20)</sup>	High Performance Option	★

# Rosemount 3051

Table 1. 3051C Coplanar Pressure Transmitters Ordering Information

★ The Standard offering represents the most common options. The starred options (★) should be selected for best delivery.  
The Expanded offering is subject to additional delivery lead time.

<b>Flange Adapters</b>		
<b>Standard</b>		<b>Standard</b>
DF <sup>(21)</sup>	1/2-14 NPT flange adapter(s)	★
<b>Vent/Drain Valves</b>		
<b>Expanded</b>		
D7	Coplanar Flange Without Drain/Vent Ports	
<b>Conduit Plug</b>		
<b>Standard</b>		<b>Standard</b>
DO <sup>(22)</sup>	316 SST Conduit Plug	★
<b>RC<sup>1/4</sup> RC<sup>1/2</sup> Process Connection</b>		
<b>Expanded</b>		
D9 <sup>(23)</sup>	RC 1/4 Flange with RC 1/2 Flange Adapter - SST	
<b>Max Static Line Pressure</b>		
<b>Standard</b>		<b>Standard</b>
P9	4500 psig (310 bar) Static Pressure Limit (3051CD Ranges 2-5 only)	★
<b>Ground Screw</b>		
<b>Standard</b>		<b>Standard</b>
V5 <sup>(24)</sup>	External Ground Screw Assembly	★
<b>Surface Finish</b>		
<b>Standard</b>		<b>Standard</b>
Q16	Surface finish certification for sanitary remote seals	★
<b>Toolkit Total System Performance Reports</b>		
<b>Standard</b>		<b>Standard</b>
QZ	Remote Seal System Performance Calculation Report	★
<b>Conduit Electrical Connector</b>		
<b>Standard</b>		<b>Standard</b>
GE	M12, 4-pin, Male Connector (eurofast <sup>®</sup> )	★
GM	A size Mini, 4-pin, Male Connector (minifast <sup>®</sup> )	★
<b>Typical Model Number: 3051CD 2 A 2 2 A 1 A B4</b>		

(1) 3051CD0 is available only with Output Code A, Process Flange Code 0 (Alternate Flange H2, H7, HJ, or HK), Isolating Diaphragm Code 2, O-ring Code A, and Bolting Option L4.

(2) Option code M4 - LCD Display with Local Operator Interface required for local addressing and configuration.

(3) Materials of Construction comply with recommendations per NACE MR0175/ISO 15156 for sour oil field production environments. Environmental limits apply to certain materials. Consult latest standard for details. Selected materials also conform to NACE MR0103 for sour refining environments.

(4) Requires 0 code in Materials of Construction for Alternate Process Connection.

(5) Not valid with optional code P9 for 4500 psi Static Pressure.

(6) Process Flange limited to Coplanar (codes 2, 3, 5, 7, 8) or Traditional (H2, H3, H7).

(7) Not valid with optional code D9 for RC1/2 Adaptors.

(8) Not valid for optional codes DF and D9 for Adaptors.

(9) "Assemble-to" items are specified separately and require a completed model number.

(10) Available only with output codes A - 4-20 HART and F - FOUNDATION fieldbus.

(11) Not available with Low Power code M.

(12) Available only with 3051CD and 3051CG and output code A - 4-20 mA HART



## Product Data Sheet

00813-0100-4001, Rev LA

November 2010

# Rosemount 3051

---

- (13) Not available with Alloy C-276 isolator (3 code), tantalum isolator (5 code), all cast C-276 flanges, all plated CS flanges, all DIN flanges, all Level flanges, assemble-to manifolds (S5 and S6 codes), assemble-to seals (S1 and S2 codes), assemble-to primary elements (S3 and S4 codes), surface finish certification (Q16 code), and remote seal system report (QZ code).*
- (14) Available only with output code W - Profibus PA.*
- (15) Only available with HART 4-20 mA output (output code A).*
- (16) Not available with Fieldbus (output code F) or Profibus (output code W).*
- (17) Local zero and span adjustments are standard unless Option Code J1 or J3 is specified*
- (18) The T1 option is not needed with FISCO Product Certifications; transient protection is included in the FISCO product certification codes IA and IE.*
- (19) NAMUR-Compliant operation is pre-set at the factory and cannot be changed to standard operation in the field.*
- (20) High Performance Option includes 0.04% Reference Accuracy. See Performance Specifications for details.*
- (21) Not valid with Alternate Process Connection options S3, S4, S5, and S6.*
- (22) Transmitter is shipped with 316 SST conduit plug (uninstalled) in place of standard carbon steel conduit plug.*
- (23) Not available with Alternate Process Connection; DIN Flanges and Level Flanges.*
- (24) The V5 option is not needed with the T1 option; external ground screw assembly is included with the T1 option.*

# Rosemount 3051

## Rosemount 3051T In-Line Pressure Transmitter



**3051T In-Line  
Pressure Transmitter**

Rosemount 3051T In-line Pressure transmitters provide reliable Gage and Absolute pressure measurement in a compact in-line design. Select from the following capabilities for seamless integration:

- Performance up to 0.04% accuracy
- Manifolds and Seal Solutions
- 4-20 mA HART, 1-5 Vdc HART low power, FOUNDATION fieldbus, and Profibus PA protocols
- Calibrated spans/ranges from 0.3 to 10,000 psi (10,3 mbar to 689 bar)
- 316 SST and Alloy C-276 process isolators

### Additional Information

Specifications: page 35

Certifications: page 44

Dimensional Drawings: page 49

Table 2. 3051T In-Line Pressure Transmitter Ordering Information

★ The Standard offering represents the most common options. The starred options (★) should be selected for best delivery. The Expanded offering is subject to additional delivery lead time.

Model	Transmitter Type		
3051T	In-Line Pressure Transmitter		
<b>Pressure Type</b>			
<b>Standard</b>			<b>Standard</b>
G	Gage		★
A	Absolute		★
<b>Pressure Range</b>			
	<b>3051TG<sup>(1)</sup></b>	<b>3051TA</b>	
<b>Standard</b>			<b>Standard</b>
1	-14.7 to 30 psi (-1.0 to 2.1 bar)	0 to 30 psia (0 to 2.1 bar)	★
2	-14.7 to 150 psi (-1.0 to 10.3 bar)	0 to 150 psia (0 to 10.3 bar)	★
3	-14.7 to 800 psi (-1.0 to 55 bar)	0 to 800 psia (0 to 55 bar)	★
4	-14.7 to 4000 psi (-1.0 to 276 bar)	0 to 4000 psia (0 to 276 bar)	★
5	-14.7 to 10000 psi (-1.0 to 689 bar)	0 to 10000 psia (0 to 689 bar)	★
<b>Transmitter Output</b>			
<b>Standard</b>			<b>Standard</b>
A	4–20 mA with Digital Signal Based on HART Protocol		★
F	FOUNDATION fieldbus Protocol		★
W <sup>(2)</sup>	Profibus PA Protocol		★
<b>Expanded</b>			
M	Low-Power 1–5 V dc with Digital Signal Based on HART Protocol		
<b>Process Connection Style</b>			
<b>Standard</b>			<b>Standard</b>
2B	1/2–14 NPT Female		★
2C	G½ A DIN 16288 Male (Available in SST for Range 1–4 only)		★
<b>Expanded</b>			
2F	Coned and Threaded, Compatible with Autoclave Type F-250-C		
61	Non-threaded Instrument flange (Range 1-4 only)		
<b>Isolating Diaphragm</b>		<b>Process Connection Wetted Parts Material</b>	
<b>Standard</b>			<b>Standard</b>
2 <sup>(3)</sup>	316L SST	316L SST	★
3 <sup>(3)</sup>	Alloy C-276	Alloy C-276	★

# Product Data Sheet

00813-0100-4001, Rev LA

November 2010

# Rosemount 3051

Table 2. 3051T In-Line Pressure Transmitter Ordering Information

★ The Standard offering represents the most common options. The starred options (★) should be selected for best delivery.  
The Expanded offering is subject to additional delivery lead time.

Sensor Fill Fluid		
<b>Standard</b>		<b>Standard</b>
1	Silicone	★
2	Inert	★
Housing Material		Conduit Entry Size
<b>Standard</b>		<b>Standard</b>
A	Aluminum	½–14 NPT
B	Aluminum	M20 × 1.5
J	SST	½–14 NPT
K	SST	M20 × 1.5
<b>Expanded</b>		
D	Aluminum	G½
M	SST	G½

## Options (Include with selected model number)

PlantWeb Control Functionality		
<b>Standard</b>		<b>Standard</b>
A01	Advanced Control Function Block Suite	★
PlantWeb Diagnostic Functionality		
<b>Standard</b>		<b>Standard</b>
D01	FOUNDATION fieldbus Diagnostics Suite	★
Manifold Assemblies		
<b>Standard</b>		<b>Standard</b>
S5 <sup>(4)</sup>	Assemble to Rosemount 306 Integral Manifold	★
Seal Assemblies		
<b>Standard</b>		<b>Standard</b>
S1 <sup>(4)</sup>	Assemble to one Rosemount 1199 seal	★
Mounting Bracket		
<b>Standard</b>		<b>Standard</b>
B4	Bracket for 2-in. Pipe or Panel Mounting, All SST	★
Product Certifications		
<b>Standard</b>		<b>Standard</b>
C6	CSA Explosion-proof, Dust Ignition-proof, Intrinsically Safe, and Division 2	★
E2	INMETRO Flameproof	★
E3	China Flameproof	★
E4 <sup>(5)</sup>	TIIS Flameproof	★
E5	FM Explosion-proof, Dust Ignition-proof	★
E7 <sup>(5)</sup>	IECEx Flameproof, Dust Ignition-proof	★
E8	ATEX Flameproof and Dust Certification	★
I1 <sup>(5)</sup>	ATEX Intrinsic Safety and Dust	★
I2	INMETRO Intrinsic Safety	★
I3	China Intrinsic Safety	★
I5	FM Intrinsically Safe, Division 2	★
I7 <sup>(5)</sup>	IECEx Intrinsic Safety	★
IA	ATEX Intrinsic Safety for FISCO; for FOUNDATION fieldbus protocol only	★
IE	FM FISCO Intrinsically Safe; for FOUNDATION fieldbus protocol only	★
K2	INMETRO Flameproof, Intrinsic Safety	★
K5	FM Explosion-proof, Dust Ignition-proof, Intrinsically Safe, and Division 2	★
K6 <sup>(5)</sup>	CSA and ATEX Explosion-proof, Intrinsically Safe, and Division 2 (combination of C6 and K8)	★
K7 <sup>(5)</sup>	IECEx Flameproof, Dust Ignition-proof, Intrinsic Safety, and Type n (combination of I7, N7, and E7)	★
K8 <sup>(5)</sup>	ATEX Flame-proof, Intrinsic Safety, Type n, Dust (combination of E8, I1 and N1)	★
KB	FM and CSA Explosion-proof, Dust Ignition-proof, Intrinsically Safe, and Division 2 (combination of K5 and C6)	★
KD <sup>(5)</sup>	FM, CSA, and ATEX Explosion-proof, Intrinsically Safe (combination of K5, C6, I1, and E8)	★
N1 <sup>(5)</sup>	ATEX Type n Certification and Dust	★
N3	China Type n	★
N7 <sup>(5)</sup>	IECEx Type n Certification	★

# Rosemount 3051

Table 2. 3051T In-Line Pressure Transmitter Ordering Information

★ The Standard offering represents the most common options. The starred options (★) should be selected for best delivery.  
The Expanded offering is subject to additional delivery lead time.

<b>Drinking Water Approval</b>		
<b>Standard</b>		<b>Standard</b>
DW <sup>(6)</sup>	NSF drinking water approval	★
<b>Shipboard Approvals</b>		
<b>Standard</b>		<b>Standard</b>
SBS	American Bureau of Shipping	★
<b>Custody Transfer</b>		
<b>Standard</b>		<b>Standard</b>
C5	Measurement Canada Accuracy Approval ( <i>Limited availability depending on transmitter type and range. Contact an Emerson Process Management representative</i> )	★
<b>Calibration Certification</b>		
<b>Standard</b>		<b>Standard</b>
Q4	Calibration Certificate	★
QG	Calibration Certificate and GOST Verification Certificate	★
QP	Calibration Certification and tamper evident seal	★
<b>Material Traceability Certification</b>		
<b>Standard</b>		<b>Standard</b>
Q8	Material Traceability Certification per EN 10204 3.1.B	★
<b>Quality Certification for Safety</b>		
<b>Standard</b>		<b>Standard</b>
QS <sup>(7)</sup>	Prior-use certificate of FMEDA Data	★
<b>Zero/Span Adjustment</b>		
<b>Standard</b>		<b>Standard</b>
J1 <sup>(8)(9)</sup>	Local Zero Adjustment Only	★
J3 <sup>(8)(9)</sup>	No Local Zero or Span Adjustment	★
<b>Expanded</b>		
D1	Hardware adjustments (zero, span, alarm, security)	
<b>Display and Interface Options</b>		
<b>Standard</b>		<b>Standard</b>
M4 <sup>(10)</sup>	LCD Display with Local Operator Interface	★
M5	LCD Display	★
M6	LCD Display for SST Housing (Housing Codes J, K, L and M only)	★
<b>Conduit Plug</b>		
<b>Standard</b>		<b>Standard</b>
DO <sup>(11)</sup>	316 SST Conduit Plug	★
<b>Transient Terminal Block</b>		
<b>Standard</b>		<b>Standard</b>
T1 <sup>(12)</sup>	Transient Protection Terminal Block	★
<b>Software Configuration</b>		
<b>Standard</b>		<b>Standard</b>
C1 <sup>(8)</sup>	Custom Software Configuration (Completed CDS 00806-0100-4001 required with order)	★
<b>Expanded</b>		
C2 <sup>(8)</sup>	0.8–3.2 V dc Output with Digital Signal Based on HART Protocol (Output Code M only)	
<b>Alarm Limit</b>		
<b>Standard</b>		<b>Standard</b>
C4 <sup>(8)(13)</sup>	Analog Output Levels Compliant with NAMUR Recommendation NE 43, Alarm High	★
CN <sup>(8)(13)</sup>	Analog Output Levels Compliant with NAMUR Recommendation NE 43, Low Alarm	★
<b>Pressure Testing</b>		
<b>Expanded</b>		
P1	Hydrostatic Testing with Certificate	

Table 2. 3051T In-Line Pressure Transmitter Ordering Information

★ The Standard offering represents the most common options. The starred options (★) should be selected for best delivery.  
 The Expanded offering is subject to additional delivery lead time.

<b>Cleaning Process Area<sup>(14)</sup></b>		
<b>Expanded</b>		
P2	Cleaning for Special Service	
P3	Cleaning for <1 PPM Chlorine/Fluorine	
<b>Performance</b>		
<b>Standard</b>		<b>Standard</b>
P8 <sup>(15)</sup>	High Performance Option	★
<b>Ground Screw</b>		
<b>Standard</b>		<b>Standard</b>
V5 <sup>(16)</sup>	External Ground Screw Assembly	★
<b>Surface Finish</b>		
<b>Standard</b>		<b>Standard</b>
Q16	Surface finish certification for sanitary remote seals	★
<b>Toolkit Total System Performance Reports</b>		
<b>Standard</b>		<b>Standard</b>
QZ	Remote Seal System Performance Calculation Report	★
<b>Conduit Electrical Connector</b>		
<b>Standard</b>		<b>Standard</b>
GE	M12, 4-pin, Male Connector (eurofast <sup>®</sup> )	★
GM	A size Mini, 4-pin, Male Connector (minifast <sup>®</sup> )	★
<b>Typical Model Number:</b>		<b>3051T G 5 F 2A 2 1 A B4</b>

- (1) 3051TG lower range limit varies with atmospheric pressure.
- (2) Option code M4 - LCD Display with Local Operator Interface required for local addressing and configuration.
- (3) Materials of Construction comply with recommendations per NACE MR0175/ISO 15156 for sour oil field production environments. Environmental limits apply to certain materials. Consult latest standard for details. Selected materials also conform to NACE MR0103 for sour refining environments.
- (4) "Assemble-to" items are specified separately and require a completed model number.
- (5) Not available with low-power Option Code M.
- (6) Not available with Alloy C-276 isolator (3 code), tantalum isolator (5 code), all cast C-276 flanges, all plated CS flanges, all DIN flanges, all Level flanges, assemble-to manifolds (S5 and S6 codes), assemble-to seals (S1 and S2 codes), assemble-to primary elements (S3 and S4 codes), surface finish certification (Q16 code), and remote seal system report (QZ code).
- (7) Only available with HART 4-20 mA output (output code A).
- (8) Not available with fieldbus (output code F) or Profibus protocols (output code W).
- (9) Local zero and span adjustments are standard unless Option Code J1 or J3 is specified.
- (10) Available only with output code W - Profibus PA.
- (11) Transmitter is shipped with 316 SST conduit plug (uninstalled) in place of standard carbon steel conduit plug.
- (12) The T1 option is not needed with FISCO Product Certifications; transient protection is included in the FISCO product certification codes IA and IE.
- (13) NAMUR-Compliant operation is pre-set at the factory and cannot be changed to standard operation in the field.
- (14) Not valid with Alternate Process Connection S5.
- (15) High Performance Option includes 0.04% Reference Accuracy. See Performance Specifications for details.
- (16) The V5 option is not needed with T1 option; external ground screw assembly is included with the T1 option.

# Rosemount 3051

## Rosemount 3051CF Flowmeter Series



**Rosemount 3051CFA  
Annubar Flowmeter**

Rosemount 3051CF Flowmeters combine the proven 3051C pressure transmitter and the latest primary element technology: Annubar Averaging Pitot Tube, Compact Conditioning Orifice Plate, and Integral Orifice Plate.

- Flowmeters are factory configured to meet your application needs (Configuration Data Sheet required)
- 4-20 mA HART, FOUNDATION fieldbus, and Profibus PA protocols
- Integral temperature measurement (T option)
- Direct or remote mount configurations available

**Additional Information**

Specifications: page 35  
Certifications: page 44  
Dimensional Drawings: page 49

Table 3. Rosemount 3051CFA Annubar Flowmeter Ordering Information

★ The Standard offering represents the most common options. The starred options (★) should be selected for best delivery. The Expanded offering is subject to additional delivery lead time.

Model	Product Description	
3051CFA	Annubar Flowmeter	
<b>Measurement Type</b>		
<b>Standard</b>		<b>Standard</b>
D	Differential Pressure	★
<b>Fluid Type</b>		
<b>Standard</b>		<b>Standard</b>
L	Liquid	★
G	Gas	★
S	Steam	★
<b>Line Size</b>		
<b>Standard</b>		<b>Standard</b>
020	2-in. (50 mm)	★
025	2 <sup>1</sup> / <sub>2</sub> -in. (63.5 mm)	★
030	3-in. (80 mm)	★
035	3 <sup>1</sup> / <sub>2</sub> -in. (89 mm)	★
040	4-in. (100 mm)	★
050	5-in. (125 mm)	★
060	6-in. (150 mm)	★
070	7-in. (175 mm)	★
080	8-in. (200 mm)	★
100	10-in. (250 mm)	★
120	12-in. (300 mm)	★
<b>Expanded</b>		
140	14-in. (350 mm)	
160	16-in. (400 mm)	
180	18-in. (450 mm)	
200	20-in. (500 mm)	
240	24-in. (600 mm)	
300	30-in. (750 mm)	
360	36-in. (900 mm)	
420	42-in. (1066 mm)	
480	48-in. (1210 mm)	
600	60-in. (1520 mm)	
720	72-in. (1820 mm)	
780	78-in. (1950 mm)	

# Product Data Sheet

00813-0100-4001, Rev LA

November 2010

# Rosemount 3051

Table 3. Rosemount 3051CFA Annubar Flowmeter Ordering Information

★ The Standard offering represents the most common options. The starred options (★) should be selected for best delivery. The Expanded offering is subject to additional delivery lead time.

840	84-in. (2100 mm)	
900	90-in. (2250 mm)	
960	96-in (2400 mm)	
<b>Pipe I.D. Range</b>		
<b>Standard</b>		<b>Standard</b>
C	Range C from the Pipe I.D. table	★
D	Range D from the Pipe I.D. table	★
<b>Expanded</b>		
A	Range A from the Pipe I.D. table	
B	Range B from the Pipe I.D. table	
E	Range E from the Pipe I.D. table	
Z	Non-standard Pipe I.D. Range or Line Sizes greater than 12 inches	
<b>Pipe Material / Mounting Assembly Material</b>		
<b>Standard</b>		<b>Standard</b>
C	Carbon steel (A105)	★
S	316 Stainless Steel	★
0	No Mounting (Customer Supplied)	★
<b>Expanded</b>		
G	Chrome-Moly Grade F-11	
N	Chrome-Moly Grade F-22	
J	Chrome-Moly Grade F-91	
<b>Piping Orientation</b>		
<b>Standard</b>		<b>Standard</b>
H	Horizontal Piping	★
D	Vertical Piping with Downwards Flow	★
U	Vertical Piping with Upwards Flow	★
<b>Annubar Type</b>		
<b>Standard</b>		<b>Standard</b>
P	Pak-Lok	★
F	Flanged with opposite side support	★
<b>Expanded</b>		
L	Flange-Lok	
G	Gear-Drive Flo-Tap	
M	Manual Flo-Tap	
<b>Sensor Material</b>		
<b>Standard</b>		<b>Standard</b>
S	316 Stainless Steel	★
<b>Expanded</b>		
H	Alloy C-276	
<b>Sensor Size</b>		
<b>Standard</b>		<b>Standard</b>
1	Sensor size 1 — Line sizes 2-in. (50 mm) to 8-in. (200 mm)	★
2	Sensor size 2 — Line sizes 6-in. (150 mm) to 96-in. (2400 mm)	★
3	Sensor size 3 — Line sizes greater than 12-in. (300 mm)	★
<b>Mounting Type</b>		
<b>Standard</b>		<b>Standard</b>
T1	Compression or Threaded Connection	★
A1	150# RF ANSI	★
A3	300# RF ANSI	★
A6	600# RF ANSI	★
D1	DN PN16 Flange	★
D3	DN PN40 Flange	★
D6	DN PN100 Flange	★

# Rosemount 3051

Table 3. Rosemount 3051CFA Annubar Flowmeter Ordering Information

★ The Standard offering represents the most common options. The starred options (★) should be selected for best delivery. The Expanded offering is subject to additional delivery lead time.

<b>Expanded</b>			
A9 <sup>(1)</sup>	900# RF ANSI		
AF <sup>(1)</sup>	1500# RF ANSI		
AT <sup>(1)</sup>	2500 # RF ANSI		
R1	150# RTJ Flange		
R3	300# RTJ Flange		
R6	600# RTJ Flange		
R9 <sup>(1)</sup>	900# RTJ Flange		
RF <sup>(1)</sup>	1500# RTJ Flange		
RT <sup>(1)</sup>	2500# RTJ Flange		
<b>Opposite Side Support or Packing Gland</b>			
<b>Standard</b>			<b>Standard</b>
0	No opposite side support or packing gland (Required for Pak-Lok and Flange-Lok models)		★
<b>Opposite Side Support – Required for Flanged Models</b>			
C	NPT Threaded Opposite Support Assembly – Extended Tip		★
D	Welded Opposite Support Assembly – Extended Tip		★
<b>Expanded</b>			
<b>Packing Gland – Required for Flo-Tap Models</b>			
	<i>Packing Gland Material</i>	<i>Rod Material</i>	<i>Packing Material</i>
J	Stainless Steel Packing Gland / Cage Nipple	Carbon Steel	PTFE
K	Stainless Steel Packing Gland / Cage Nipple	Stainless Steel	PTFE
L	Stainless Steel Packing Gland / Cage Nipple	Carbon Steel	Graphite
N	Stainless Steel Packing Gland / Cage Nipple	Stainless Steel	Graphite
R	Alloy C-276 Packing Gland / Cage Nipple	Stainless Steel	Graphite
<b>Isolation Valve for Flo-Tap Models</b>			
<b>Standard</b>			<b>Standard</b>
0	Not Applicable or Customer Supplied		★
<b>Expanded</b>			
1	Gate Valve, Carbon Steel		
2	Gate Valve, Stainless Steel		
5	Ball Valve, Carbon Steel		
6	Ball Valve, Stainless Steel		
<b>Temperature Measurement</b>			
<b>Standard</b>			<b>Standard</b>
T	Integral RTD – not available with Flanged model greater than class 600#		★
0	No Temperature Sensor		★
<b>Expanded</b>			
R	Remote Thermowell and RTD		
<b>Transmitter Connection Platform</b>			
<b>Standard</b>			<b>Standard</b>
3	Direct-mount, Integral 3-valve Manifold– not available with Flanged model greater than class 600		★
5	Direct -mount, 5-valve Manifold – not available with Flanged model greater than class 600		★
7	Remote-mount NPT Connections ( <sup>1</sup> / <sub>2</sub> -in. NPT)		★
<b>Expanded</b>			
6	Direct-mount, high temperature 5-valve Manifold – not available with Flanged model greater than class 600		
8	Remote-mount SW Connections ( <sup>1</sup> / <sub>2</sub> -in.)		
<b>Differential Pressure Range</b>			
<b>Standard</b>			<b>Standard</b>
1	0 to 25 in H <sub>2</sub> O (0 to 62,3 mbar)		★
2	0 to 250 in H <sub>2</sub> O (0 to 623 mbar)		★
3	0 to 1000 in H <sub>2</sub> O (0 to 2,5 bar)		★



# Product Data Sheet

00813-0100-4001, Rev LA

November 2010

# Rosemount 3051

Table 3. Rosemount 3051CFA Annubar Flowmeter Ordering Information

★ The Standard offering represents the most common options. The starred options (★) should be selected for best delivery. The Expanded offering is subject to additional delivery lead time.

Transmitter Output		
<b>Standard</b>		<b>Standard</b>
A	4–20 mA with digital signal based on HART Protocol	★
F	FOUNDATION fieldbus Protocol	★
W <sup>(2)</sup>	Profibus PA Protocol	★
<b>Expanded</b>		
M	Low-Power, 1-5 V dc with Digital Signal Based on HART Protocol	
Transmitter Housing Material		Conduit Entry Size
<b>Standard</b>		<b>Standard</b>
A	Aluminum	1/2-14 NPT
B	Aluminum	M20 x 1.5
J	SST	1/2-14 NPT
K	SST	M20 x 1.5
<b>Expanded</b>		
D	Aluminum	G1/2
M	SST	G1/2
Transmitter Performance Class		
<b>Standard</b>		<b>Standard</b>
1	1.6% flow rate accuracy, 8:1 flow turndown, 5-yr. stability	★

## Options (Include with selected model number)

Pressure Testing		
<b>Expanded</b>		
P1 <sup>(3)</sup>	Hydrostatic Testing with Certificate	
PX <sup>(3)</sup>	Extended Hydrostatic Testing	
Special Cleaning		
<b>Expanded</b>		
P2	Cleaning for Special Services	
PA	Cleaning per ASTM G93 Level D (Section 11.4)	
Material Testing		
<b>Expanded</b>		
V1	Dye Penetrant Exam	
Material Examination		
<b>Expanded</b>		
V2	Radiographic Examination	
Flow Calibration		
<b>Expanded</b>		
W1	Flow Calibration (Average K)	
Special Inspection		
<b>Standard</b>		<b>Standard</b>
QC1	Visual & Dimensional Inspection with Certificate	★
QC7	Inspection & Performance Certificate	★
Surface Finish		
<b>Standard</b>		<b>Standard</b>
RL	Surface finish for Low Pipe Reynolds # in Gas & Steam	★
RH	Surface finish for High Pipe Reynolds # in Liquid	★
Material Traceability Certification		
<b>Standard</b>		<b>Standard</b>
Q8 <sup>(4)</sup>	Material Traceability Certification per EN 10474:2004 3.1	★
Code Conformance <sup>(5)</sup>		
<b>Expanded</b>		
J2	ANSI/ASME B31.1	
J3	ANSI/ASME B31.3	

# Rosemount 3051

Table 3. Rosemount 3051CFA Annubar Flowmeter Ordering Information

★ The Standard offering represents the most common options. The starred options (★) should be selected for best delivery.  
The Expanded offering is subject to additional delivery lead time.

Materials Conformance		
<b>Expanded</b>		
J5 <sup>(6)</sup>	NACE MR-0175 / ISO 15156	
<b>Country Certification</b>		
<b>Standard</b>		<b>Standard</b>
J6	European Pressure Directive (PED)	★
<b>Expanded</b>		
J1	Canadian Registration	
<b>Installed in Flanged Pipe Spool Section</b>		
<b>Expanded</b>		
H3	150# Flanged Connection with Rosemount Standard Length and Schedule	
H4	300# Flanged Connection with Rosemount Standard Length and Schedule	
H5	600# Flanged Connection with Rosemount Standard Length and Schedule	
<b>Instrument Connections for Remote Mount Options</b>		
<b>Standard</b>		<b>Standard</b>
G2	Needle Valves, Stainless Steel	★
G6	OS&Y Gate Valve, Stainless Steel	★
<b>Expanded</b>		
G1	Needle Valves, Carbon Steel	
G3	Needle Valves, Alloy C-276	
G5	OS&Y Gate Valve, Carbon Steel	
G7	OS&Y Gate Valve, Alloy C-276	
<b>Special Shipment</b>		
<b>Standard</b>		<b>Standard</b>
Y1	Mounting Hardware Shipped Separately	★
<b>Special Dimensions</b>		
<b>Expanded</b>		
VM	Variable Mounting	
VT	Variable Tip	
VS	Variable length Spool Section	
<b>PlantWeb Control Functionality</b>		
<b>Standard</b>		<b>Standard</b>
A01 <sup>(7)</sup>	FOUNDATION fieldbus Advanced Control Function Block Suite	★
<b>PlantWeb Diagnostic Functionality</b>		
<b>Standard</b>		<b>Standard</b>
D01 <sup>(7)</sup>	FOUNDATION fieldbus Diagnostics Suite	★
<b>Product Certifications</b>		
<b>Standard</b>		<b>Standard</b>
C6	CSA Explosion-proof, Dust Ignition-proof, Intrinsically Safe, Division 2	★
E5	FM Explosion-proof, Dust Ignition-proof	★
E7 <sup>(8)</sup>	IECEx Flameproof, Dust Ignition-proof	★
E8	ATEX Flameproof, Dust	★
I1 <sup>(8)</sup>	ATEX Intrinsic Safety	★
I5	FM Intrinsically Safe, Division 2	★
IA	ATEX FISCO Intrinsic Safety; for FOUNDATION fieldbus protocol only	★
K5	FM Explosion-proof, Dust Ignition-proof, Intrinsically Safe, Division 2 (combination of E5 and I5)	★
K6 <sup>(8)</sup>	CSA Explosion-proof, Dust Ignition-proof, Intrinsically Safe, Division 2 (combination of E6 and I6)	★
K8 <sup>(8)</sup>	ATEX Flameproof, Intrinsic Safety, Type n, Dust (combination of E8, I1 and N1)	★
KB	FM and CSA Explosion-proof, Dust Ignition-proof, Intrinsically Safe, Division 2 (combination of K5 and C6)	★
KD <sup>(8)</sup>	FM, CSA, and ATEX Explosion-proof, Intrinsically Safe (combination of K5, C6, I1, and E8)	★
N1 <sup>(8)</sup>	ATEX Type n	★
<b>Sensor Fill Fluid and O-ring Options</b>		
<b>Standard</b>		<b>Standard</b>
L1	Inert Sensor Fill Fluid <i>Note: Silicone fill fluid is standard.</i>	★
L2	Graphite-Filled (PTFE) O-ring	★
LA	Inert Sensor Fill Fluid and Graphite-Filled (PTFE) O-ring	★

# Product Data Sheet

00813-0100-4001, Rev LA

November 2010

# Rosemount 3051

Table 3. Rosemount 3051CFA Annubar Flowmeter Ordering Information

★ The Standard offering represents the most common options. The starred options (★) should be selected for best delivery. The Expanded offering is subject to additional delivery lead time.

Shipboard Approvals		
<b>Standard</b>		<b>Standard</b>
SBS	American Bureau of Shipping	★
<b>Display and Interface Options</b>		
<b>Standard</b>		<b>Standard</b>
M4 <sup>(9)</sup>	LCD Display with Local Operator Interface	★
M5	LCD Display	★
<b>Transmitter Calibration Certification</b>		
<b>Standard</b>		<b>Standard</b>
Q4	Calibration Certificate for Transmitter	★
<b>Quality Certification for Safety</b>		
<b>Standard</b>		<b>Standard</b>
QS <sup>(11)</sup>	Prior-use certificate of FMEDA data	★
<b>Transient Protection</b>		
<b>Standard</b>		<b>Standard</b>
T1 <sup>(10)</sup>	Transient terminal block	★
<b>Manifold for Remote Mount Option</b>		
<b>Standard</b>		<b>Standard</b>
F2	3-Valve Manifold, Stainless Steel	★
F6	5-Valve Manifold, Stainless Steel	★
<b>Expanded</b>		
F1	3-Valve Manifold, Carbon Steel	
F3	3-Valve Manifold, Alloy C-276	
F5	5-Valve Manifold, Carbon Steel	
F7	5-Valve Manifold, Alloy C-276	
<b>Lower Power Output</b>		
<b>Standard</b>		<b>Standard</b>
C2 <sup>(11)</sup>	0.8-3.2 V dc Output with Digital Signal Based on Hart Protocol	★
<b>Alarm Limit</b>		
<b>Standard</b>		<b>Standard</b>
C4 <sup>(11)(12)</sup>	NAMUR Alarm and Saturation Levels, High Alarm	★
CN <sup>(11)(12)</sup>	NAMUR Alarm and Saturation Levels, Low Alarm	★
<b>Ground Screw</b>		
<b>Standard</b>		<b>Standard</b>
V5 <sup>(13)</sup>	External Ground Screw Assembly	★
<b>Typical Model Number: 3051CFA D L 060 D C H P S 2 T1 0 0 0 3 2 A A 1</b>		

(1) Available in remote mount applications only.

(2) Option code M4 - LCD Display with Local Operator Interface required for local addressing and configuration.

(3) Applies to assembled flowmeter only, mounting not tested.

(4) Instrument Connections for Remote Mount Options and Isolation Valves for Flo-tap Models are not included in the Material Traceability Certification.

(5) Not available with Transmitter Connection Platform 6.

(6) Materials of Construction comply with metallurgical requirements within NACE MR0175/ISO for sour oil field production environments. Environmental limits apply to certain materials. Consult latest standard for details. Selected materials also conform to NACE MR0103 for sour refining environments.

(7) Only valid with FOUNDATION fieldbus Output Code F.

(8) Not available with Low Power code M.

(9) Available only with output code W - Profibus PA.

(10) The T1 option is not needed with FISCO Product Certifications, transient protection is included with the FISCO Product Certification code IA.

(11) Not available with FOUNDATION fieldbus (Output Code F) or Profibus (Output Code W).

(12) NAMUR-Compliant operation is pre-set at the factory and cannot be changed to standard operation in the field.

(13) The V5 option is not needed with the T1 option; external ground screw assembly is included with the T1 option.

# Rosemount 3051



## Rosemount 3051CFC Compact Flowmeter

### Additional Information

Specifications: page 35

Certifications: page 44

Dimensional Drawings: page 49

Table 4. Rosemount 3051CFC Compact Flowmeter Ordering Information

★ The Standard offering represents the most common options. The starred options (★) should be selected for best delivery.  
The Expanded offering is subject to additional delivery lead time.

Model	Product Description	
3051CFC	Compact Flowmeter	
<b>Measurement Type</b>		
<b>Standard</b>		<b>Standard</b>
D	Differential Pressure	★
<b>Primary Element Technology</b>		
<b>Standard</b>		<b>Standard</b>
C	Conditioning Orifice Plate	★
P	Orifice Plate	★
<b>Material Type</b>		
<b>Standard</b>		<b>Standard</b>
S	316 SST	★
<b>Line Size</b>		
<b>Standard</b>		<b>Standard</b>
005 <sup>(1)</sup>	1/2-in. (15 mm)	★
010 <sup>(1)</sup>	1-in. (25 mm)	★
015 <sup>(1)</sup>	1 1/2-in. (40 mm)	★
020	2-in. (50 mm)	★
030	3-in. (80 mm)	★
040	4-in. (100 mm)	★
060	6-in. (150 mm)	★
080	8-in. (200 mm)	★
100	10-in. (250 mm)	★
120	12-in. (300 mm)	★
<b>Primary Element Style</b>		
<b>Standard</b>		<b>Standard</b>
N	Square Edged	★
<b>Primary Element Type</b>		
<b>Standard</b>		<b>Standard</b>
040	0.40 Beta Ratio	★
065 <sup>(2)</sup>	0.65 Beta Ratio	★
<b>Temperature Measurement</b>		
<b>Standard</b>		<b>Standard</b>
0	No Temperature Sensor	★
<b>Expanded</b>		
R	Remote Thermowell and RTD	
<b>Transmitter Connection Platform</b>		
<b>Standard</b>		<b>Standard</b>
3	Direct-mount, Integral 3-valve Manifold	★
7	Remote-mount, 1/4-in. NPT Connections	★
<b>Differential Pressure Range</b>		
<b>Standard</b>		<b>Standard</b>
1	0 to 25 in H <sub>2</sub> O (0 to 62,3 mbar)	★
2	0 to 250 in H <sub>2</sub> O (0 to 623 mbar)	★
3	0 to 1000 in H <sub>2</sub> O (0 to 2,5 bar)	★

# Product Data Sheet

00813-0100-4001, Rev LA

November 2010

# Rosemount 3051

Table 4. Rosemount 3051CFC Compact Flowmeter Ordering Information

★ The Standard offering represents the most common options. The starred options (★) should be selected for best delivery. The Expanded offering is subject to additional delivery lead time.

Transmitter Output		
<b>Standard</b>		<b>Standard</b>
A	4–20 mA with digital signal based on HART Protocol	★
F	FOUNDATION fieldbus Protocol	★
W <sup>(3)</sup>	Profibus PA Protocol	★
<b>Expanded</b>		
M	Low-Power, 1-5 V dc with Digital Signal Based on HART Protocol	
Transmitter Housing Material		Conduit Entry Size
<b>Standard</b>		<b>Standard</b>
A	Aluminum	1/2-14 NPT
B	Aluminum	M20 x 1.5
J	SST	1/2-14 NPT
K	SST	M20 x 1.5
<b>Expanded</b>		
D	Aluminum	G <sup>1</sup> / <sub>2</sub>
M	SST	G <sup>1</sup> / <sub>2</sub>
Transmitter Performance Class		
<b>Standard</b>		<b>Standard</b>
1	Up to ±1.75% flow rate accuracy, 8:1 flow turndown, 5-year stability	★

## Options (Include with selected model number)

Installation Accessories		
<b>Standard</b>		<b>Standard</b>
AB	ANSI Alignment Ring (150#) (Only required for 10-in. (250 mm) and 12-in. (300mm) line sizes)	★
AC	ANSI Alignment Ring (300#) (Only required for 10-in. (250 mm) and 12-in. (300mm) line sizes)	★
AD	ANSI Alignment Ring (600#) (Only required for 10-in. (250 mm) and 12-in. (300mm) line sizes)	★
DG	DIN Alignment Ring (PN16)	★
DH	DIN Alignment Ring (PN40)	★
DJ	DIN Alignment Ring (PN100)	★
<b>Expanded</b>		
JB	JIS Alignment Ring (10K)	
JR	JIS Alignment Ring (20K)	
JS	JIS Alignment Ring (40K)	
Remote Adapters		
<b>Standard</b>		<b>Standard</b>
FE	Flange Adapters 316 SST (1/2-in NPT)	★
High Temperature Application		
<b>Expanded</b>		
HT	Graphite Valve Packing (Tmax = 850 °F)	
Flow Calibration		
<b>Expanded</b>		
WC <sup>(4)</sup>	Flow Calibration Certification (3 point)	
WD <sup>(4)</sup>	Discharge Coefficient Verification (full 10 point)	
Pressure Testing		
<b>Expanded</b>		
P1	Hydrostatic Testing with Certificate	
Special Cleaning		
<b>Expanded</b>		
P2	Cleaning for Special Services	
PA	Cleaning per ASTM G93 Level D (Section 11.4)	
Special Inspection		
<b>Standard</b>		<b>Standard</b>
QC1	Visual & Dimensional Inspection with Certificate	★
QC7	Inspection and Performance Certificate	★

# Rosemount 3051

Table 4. Rosemount 3051CFC Compact Flowmeter Ordering Information

★ The Standard offering represents the most common options. The starred options (★) should be selected for best delivery. The Expanded offering is subject to additional delivery lead time.

<b>Transmitter Calibration Certification</b>		
<b>Standard</b>		<b>Standard</b>
Q4	Calibration Certificate for Transmitter	★
<b>Quality Certification for Safety</b>		
<b>Standard</b>		<b>Standard</b>
QS <sup>(5)</sup>	Prior-use certificate of FMEDA data	★
<b>Material Traceability Certification</b>		
<b>Standard</b>		<b>Standard</b>
Q8	Material Traceability Certification per EN 10204:2004 3.1	★
<b>Code Conformance</b>		
<b>Expanded</b>		
J2	ANSI/ASME B31.1	
J3	ANSI/ASME B31.3	
J4	ANSI/ASME B31.8	
<b>Materials Conformance</b>		
<b>Expanded</b>		
J5 <sup>(6)</sup>	NACE MR-0175 / ISO 15156	
<b>Country Certification</b>		
<b>Expanded</b>		
J1	Canadian Registration	
<b>Product Certifications</b>		
<b>Standard</b>		<b>Standard</b>
C6	CSA Explosion-proof, Dust Ignition-proof, Intrinsically Safe, Division 2	★
E5	FM Explosion-proof, Dust Ignition-proof	★
E7 <sup>(7)</sup>	IECEx Flameproof, Dust Ignition-proof	★
E8	ATEX Flameproof, Dust	★
I1 <sup>(7)</sup>	ATEX Intrinsic Safety	★
I5	FM Intrinsically Safe, Division 2	★
IA	ATEX FISCO Intrinsic Safety; for FOUNDATION fieldbus protocol only	★
K5	FM Explosion-proof, Dust Ignition-proof, Intrinsically Safe, Division 2 (combination of E5 and I5)	★
K6 <sup>(7)</sup>	CSA Explosion-proof, Dust Ignition-proof, Intrinsically Safe, Division 2 (combination of E6 and I6)	★
K8 <sup>(7)</sup>	ATEX Flameproof, Intrinsic Safety, Type n, Dust (combination of E8, I1 and N1)	★
KB	FM and CSA Explosion-proof, Dust Ignition-proof, Intrinsically Safe, Division 2 (combination of K5 and C6)	★
KD <sup>(7)</sup>	FM, CSA, and ATEX Explosion-proof, Intrinsically Safe (combination of K5, C6, I1, and E8)	★
N1 <sup>(7)</sup>	ATEX Type n	★
<b>Sensor Fill Fluid and O-ring Options</b>		
<b>Standard</b>		<b>Standard</b>
L1	Inert Sensor Fill Fluid	★
L2	Graphite-Filled (PTFE) O-ring	★
LA	Inert Sensor Fill Fluid and Graphite-Filled (PTFE) O-ring	★
<b>Shipboard Approvals</b>		
<b>Standard</b>		<b>Standard</b>
SBS	American Bureau of Shipping	★
<b>Display and Interface Options</b>		
<b>Standard</b>		<b>Standard</b>
M4 <sup>(8)</sup>	LCD Display with Local Operator Interface	★
M5	LCD Display	★
<b>Transient Protection</b>		
<b>Standard</b>		<b>Standard</b>
T1 <sup>(9)</sup>	Transient terminal block	★
<b>Manifold for Remote Mount Option</b>		
<b>Standard</b>		<b>Standard</b>
F2	3-Valve Manifold, Stainless Steel	★
F6	5-Valve Manifold, Stainless Steel	★

Table 4. Rosemount 3051CFC Compact Flowmeter Ordering Information

★ The Standard offering represents the most common options. The starred options (★) should be selected for best delivery. The Expanded offering is subject to additional delivery lead time.

<b>PlantWeb Control Functionality</b>		
<b>Standard</b>		<b>Standard</b>
A01 <sup>(10)</sup>	FOUNDATION fieldbus Advanced Control Function Block Suite	★
<b>PlantWeb Diagnostic Functionality</b>		
<b>Standard</b>		<b>Standard</b>
D01 <sup>(10)</sup>	FOUNDATION fieldbus Diagnostic Suite	★
<b>Low Power Output</b>		
<b>Standard</b>		<b>Standard</b>
C2 <sup>(11)</sup>	0.8-3.2 V dc Output with Digital Signal Based on Hart Protocol	★
<b>Alarm Limit</b>		
<b>Standard</b>		<b>Standard</b>
C4 <sup>(11)(12)</sup>	NAMUR Alarm and Saturation Levels, High Alarm	★
CN <sup>(11)(12)</sup>	NAMUR Alarm and Saturation Levels, Low Alarm	★
<b>Ground Screw</b>		
<b>Standard</b>		<b>Standard</b>
V5 <sup>(13)</sup>	External Ground Screw Assembly	★
<b>Typical Model Number: 3051CFC D C S 060 N 065 0 3 2 A A 1 WC E5 M5</b>		

- (1) Not available for Primary Element Technology C.
- (2) For 2-in. (50 mm) line sizes the Primary Element Type is 0.6 for Primary Element Technology Code C.
- (3) Option code M4 - LCD Display with Local Operator Interface required for local addressing and configuration.
- (4) Not available with Primary Element Technology P.
- (5) Not available with FOUNDATION fieldbus (Output Code F) or Profibus (Output Code W).
- (6) Materials of Construction comply with metallurgical requirements within NACE MR0175/ISO for sour oil field production environments. Environmental limits apply to certain materials. Consult latest standard for details. Selected materials also conform to NACE MR0103 for sour refining environments.
- (7) Not available with Low Power code M.
- (8) Available only with output code W - Profibus PA.
- (9) The T1 option is not needed with FISCO Product Certifications, transient protection is included with the FISCO Product Certification code IA.
- (10) Only valid with FOUNDATION fieldbus Output Code F.
- (11) Not available with FOUNDATION fieldbus (Output Code F) or Profibus (Output Code W).
- (12) NAMUR-Compliant operation is pre-set at the factory and cannot be changed to standard operation in the field.
- (13) The V5 option is not needed with the T1 option; external ground screw assembly is included with the T1 option.

# Rosemount 3051



## Rosemount 3051CFP Integral Orifice Flowmeter

### Additional Information

Specifications: page 35  
Certifications: page 44  
Dimensional Drawings: page 49

Table 5. Rosemount 3051CFP Integral Orifice Flowmeter Ordering Information

★ The Standard offering represents the most common options. The starred options (★) should be selected for best delivery. The Expanded offering is subject to additional delivery lead time.

Model	Product Description	
3051CFP	Integral Orifice Flowmeter	
<b>Measurement Type</b>		
<b>Standard</b>		<b>Standard</b>
D	Differential Pressure	★
<b>Body Material</b>		
<b>Standard</b>		<b>Standard</b>
S	316 SST	★
<b>Line Size</b>		
<b>Standard</b>		<b>Standard</b>
005	1/2-in. (15 mm)	★
010	1-in. (25 mm)	★
015	1 1/2-in. (40 mm)	★
<b>Process Connection</b>		
<b>Standard</b>		<b>Standard</b>
T1	NPT Female Body (Not Available with Remote Thermowell and RTD)	★
S1 <sup>(1)</sup>	Socket Weld Body (Not Available with Remote Thermowell and RTD)	★
P1	Pipe Ends: NPT Threaded	★
P2	Pipe ends: Beveled	★
D1	Pipe Ends: Flanged, DIN PN16, slip-on	★
D2	Pipe Ends: Flanged, DIN PN40, slip-on	★
D3	Pipe Ends: Flanged, DIN PN100, slip-on	★
W1	Pipe Ends: Flanged, RF, ANSI Class 150, weld-neck	★
W3	Pipe Ends: Flanged, RF, ANSI Class 300, weld-neck	★
W6	Pipe Ends: Flanged, RF, ANSI Class 600, weld-neck	★
<b>Expanded</b>		
A1	Pipe Ends: Flanged, RF, ANSI Class 150, slip-on	
A3	Pipe Ends: Flanged, RF, ANSI Class 300, slip-on	
A6	Pipe Ends: Flanged, RF, ANSI Class 600, slip-on	
R1	Pipe Ends: Flanged, RTJ, ANSI Class 150, slip-on	
R3	Pipe Ends: Flanged, RTJ, ANSI Class 300, slip-on	
R6	Pipe Ends: Flanged, RTJ, ANSI Class 600, slip-on	
<b>Orifice Plate Material</b>		
<b>Standard</b>		<b>Standard</b>
S	316 SST	★
<b>Expanded</b>		
H	Alloy C-276	
M	Alloy 400	
<b>Bore Size Option</b>		
<b>Standard</b>		<b>Standard</b>
0066	0.066-in. (1.68 mm) for 1/2-in. Pipe	★
0109	0.109-in. (2.77 mm) for 1/2-in. Pipe	★
0160	0.160-in. (4.06 mm) for 1/2-in. Pipe	★
0196	0.196-in. (4.98 mm) for 1/2-in. Pipe	★



# Product Data Sheet

00813-0100-4001, Rev LA

November 2010

# Rosemount 3051

Table 5. Rosemount 3051CFP Integral Orifice Flowmeter Ordering Information

★ The Standard offering represents the most common options. The starred options (★) should be selected for best delivery.

The Expanded offering is subject to additional delivery lead time.

0260	0.260-in. (6.60 mm) for 1/2-in. Pipe		★
0340	0.340-in. (8.64 mm) for 1/2-in. Pipe		★
0150	0.150-in. (3.81 mm) for 1-in. Pipe		★
0250	0.250-in. (6.35 mm) for 1-in. Pipe		★
0345	0.345-in. (8.76 mm) for 1-in. Pipe		★
0500	0.500-in. (12.70 mm) for 1-in. Pipe		★
0630	0.630-in. (16.00 mm) for 1-in. Pipe		★
0800	0.800-in. (20.32 mm) for 1-in. Pipe		★
0295	0.295-in. (7.49 mm) for 1 1/2-in. Pipe		★
0376	0.376-in. (9.55 mm) for 1 1/2-in. Pipe		★
0512	0.512-in. (13.00 mm) for 1 1/2-in. Pipe		★
0748	0.748-in. (19.00 mm) for 1 1/2-in. Pipe		★
1022	1.022-in. (25.96 mm) for 1 1/2-in. Pipe		★
1184	1.184-in. (30.07 mm) for 1 1/2-in. Pipe		★
<b>Expanded</b>			
0010	0.010-in. (0.25 mm) for 1/2-in. Pipe		
0014	0.014-in. (0.36 mm) for 1/2-in. Pipe		
0020	0.020-in. (0.51 mm) for 1/2-in. Pipe		
0034	0.034-in. (0.86 mm) for 1/2-in. Pipe		
<b>Transmitter Connection Platform</b>			
<b>Standard</b>			<b>Standard</b>
D3	Direct-mount, 3-Valve Manifold, SST		★
D5	Direct-mount, 5-Valve Manifold, SST		★
R3	Remote-mount, 3-Valve Manifold, SST		★
R5	Remote-mount, 5-Valve Manifold, SST		★
<b>Expanded</b>			
D4	Direct-mount, 3-Valve Manifold, Alloy C-276		
D6	Direct-mount, 5-Valve Manifold, Alloy C-276		
D7	Direct-mount, High Temperature, 5-Valve Manifold, SST		
R4	Remote-mount, 3-Valve Manifold, Alloy C-276		
R6	Remote-mount, 5-Valve Manifold, Alloy C-276		
<b>Differential Pressure Ranges</b>			
<b>Standard</b>			<b>Standard</b>
1	0 to 25 in H <sub>2</sub> O (0 to 62,3 mbar)		★
2	0 to 250 in H <sub>2</sub> O (0 to 623 mbar)		★
3	0 to 1000 in H <sub>2</sub> O (0 to 2,5 bar)		★
<b>Transmitter Output</b>			
<b>Standard</b>			<b>Standard</b>
A	4–20 mA with digital signal based on HART Protocol		★
F	FOUNDATION fieldbus Protocol		★
W <sup>(2)</sup>	Profibus PA Protocol		★
<b>Expanded</b>			
M	Low-Power, 1-5 V dc with Digital Signal Based on HART Protocol		
<b>Transmitter Housing Material</b>			<b>Conduit Entry Size</b>
<b>Standard</b>			<b>Standard</b>
A	Aluminum	1/2-14 NPT	★
B	Aluminum	M20 x 1.5	★
J	SST	1/2-14 NPT	★
K	SST	M20 x 1.5	★
<b>Expanded</b>			
D	Aluminum	G <sup>1</sup> / <sub>2</sub>	
M	SST	G <sup>1</sup> / <sub>2</sub>	
<b>Transmitter Performance Class</b>			
<b>Standard</b>			<b>Standard</b>
1	up to ±1.75% flow rate accuracy, 8:1 flow turndown, 5-year stability		★

# Rosemount 3051

Table 5. Rosemount 3051CFP Integral Orifice Flowmeter Ordering Information

★ The Standard offering represents the most common options. The starred options (★) should be selected for best delivery. The Expanded offering is subject to additional delivery lead time.

## Options (Include with selected model number)

<b>Transmitter Body / Bolt Material</b>		
<b>Expanded</b>		
GT	High Temperature (850 °F / 454 °C)	
<b>Temperature Sensor</b>		
<b>Expanded</b>		
RT <sup>(3)</sup>	Thermowell and RTD	
<b>Optional Connection</b>		
<b>Standard</b>		<b>Standard</b>
G1	DIN 19213 Transmitter Connection	★
<b>Pressure Testing</b>		
<b>Expanded</b>		
P1 <sup>(4)</sup>	Hydrostatic Testing with Certificate	
<b>Special Cleaning</b>		
<b>Expanded</b>		
P2	Cleaning for Special Services	
PA	Cleaning per ASTM G93 Level D (Section 11.4)	
<b>Material Testing</b>		
<b>Expanded</b>		
V1	Dye Penetrant Exam	
<b>Material Examination</b>		
<b>Expanded</b>		
V2	Radiographic Examination	
<b>Flow Calibration</b>		
<b>Expanded</b>		
WD <sup>(5)</sup>	Discharge Coefficient Verification	
<b>Special Inspection</b>		
<b>Standard</b>		<b>Standard</b>
QC1	Visual & Dimensional Inspection with Certificate	★
QC7	Inspection and Performance Certificate	★
<b>Material Traceability Certification</b>		
<b>Standard</b>		<b>Standard</b>
Q8	Material Traceability Certification per EN 10204:2004 3.1	★
<b>Code Conformance</b>		
<b>Expanded</b>		
J2 <sup>(6)</sup>	ANSI/ASME B31.1	
J3 <sup>(6)</sup>	ANSI/ASME B31.3	
J4 <sup>(6)</sup>	ANSI/ASME B31.8	
<b>Materials Conformance</b>		
<b>Expanded</b>		
J5 <sup>(7)</sup>	NACE MR-0175 / ISO 15156	
<b>Country Certification</b>		
<b>Standard</b>		<b>Standard</b>
J6	European Pressure Directive (PED)	★
<b>Expanded</b>		
J1	Canadian Registration	
<b>Transmitter Calibration Certification</b>		
<b>Standard</b>		<b>Standard</b>
Q4	Calibration Certificate for Transmitter	★
<b>Quality Certification for Safety</b>		
<b>Standard</b>		<b>Standard</b>
QS <sup>(8)</sup>	Prior-use certificate of FMEDA data	★

# Product Data Sheet

00813-0100-4001, Rev LA

November 2010

# Rosemount 3051

Table 5. Rosemount 3051CFP Integral Orifice Flowmeter Ordering Information

★ The Standard offering represents the most common options. The starred options (★) should be selected for best delivery. The Expanded offering is subject to additional delivery lead time.

Product Certifications		
<b>Standard</b>		<b>Standard</b>
C6	CSA Explosion-proof, Dust Ignition-proof, Intrinsically Safe, Division 2	★
E5	FM Explosion-proof, Dust Ignition-proof	★
E7 <sup>(9)</sup>	IECEX Flameproof, Dust Ignition-proof	★
E8	ATEX Flameproof, Dust	★
I1 <sup>(9)</sup>	ATEX Intrinsic Safety	★
I5	FM Intrinsically Safe, Division 2	★
IA	ATEX FISCO Intrinsic Safety; for FOUNDATION fieldbus protocol only	★
K5	FM Explosion-proof, Dust Ignition-proof, Intrinsically Safe, Division 2 (combination of E5 and I5)	★
K6 <sup>(9)</sup>	CSA Explosion-proof, Dust Ignition-proof, Intrinsically Safe, Division 2 (combination of E6 and I6)	★
K8 <sup>(9)</sup>	ATEX Flameproof, Intrinsic Safety, Type n, Dust (combination of E8, I1 and N1)	★
KB	FM and CSA Explosion-proof, Dust Ignition-proof, Intrinsically Safe, Division 2 (combination of K5 and C6)	★
KD <sup>(9)</sup>	FM, CSA, and ATEX Explosion-proof, Intrinsically Safe (combination of K5, C6, I1 and E8)	★
N1 <sup>(9)</sup>	ATEX Type n	★
<b>Sensor Fill Fluid and O-ring Options</b>		
<b>Standard</b>		<b>Standard</b>
L1	Inert Sensor Fill Fluid	★
L2	Graphite-Filled (PTFE) O-ring	★
LA	Inert Sensor Fill Fluid and Graphite-Filled (PTFE) O-ring	★
<b>Shipboard Approvals</b>		
<b>Standard</b>		<b>Standard</b>
SBS	American Bureau of Shipping	★
<b>Display and Interface Options</b>		
<b>Standard</b>		<b>Standard</b>
M4 <sup>(10)</sup>	LCD Display with Local Operator Interface	★
M5	LCD Display	★
<b>Transient Protection</b>		
<b>Standard</b>		<b>Standard</b>
T1 <sup>(11)</sup>	Transient terminal block	★
<b>PlantWeb Control Functionality</b>		
<b>Standard</b>		<b>Standard</b>
A01 <sup>(12)</sup>	FOUNDATION fieldbus Advanced Control Function Block Suite	★
<b>PlantWeb Diagnostic Functionality</b>		
<b>Standard</b>		<b>Standard</b>
D01 <sup>(12)</sup>	FOUNDATION fieldbus Diagnostic Suite	★
<b>Lower Power Output</b>		
<b>Standard</b>		<b>Standard</b>
C2 <sup>(13)</sup>	0.8-3.2 V dc Output with Digital Signal Based on Hart Protocol	★
<b>Alarm Limit</b>		
<b>Standard</b>		<b>Standard</b>
C4 <sup>(13)(14)</sup>	NAMUR Alarm and Saturation Levels, High Alarm	★
CN <sup>(13)(14)</sup>	NAMUR Alarm and Saturation Levels, Low Alarm	★
<b>Ground Screw</b>		
<b>Standard</b>		<b>Standard</b>
V5 <sup>(15)</sup>	External Ground Screw Assembly	★
<b>Typical Model Number: 3051CFP D S 010 W1 S 0500 D3 2 A A 1 E5 M5</b>		

(1) To improve pipe perpendicularity for gasket sealing, socket diameter is smaller than standard pipe O.D.

(2) Option code M4 - LCD Display with Local Operator Interface required for local addressing and configuration.

(3) Thermowell Material is the same as the body material.

(4) Does not apply to Process Connection codes T1 and S1.

(5) Not available for bore sizes 0010, 0014, 0020, or 0034.

(6) Not available with DIN Process Connection codes D1, D2, or D3.

- (7) *Materials of Construction comply with metallurgical requirements within NACE MR0175/ISO for sour oil field production environments. Environmental limits apply to certain materials. Consult latest standard for details. Selected materials also conform to NACE MR0103 for sour refining environments.*
- (8) *Not available with FOUNDATION fieldbus (Output Code F) or Profibus (Output Code W).*
- (9) *Not available with Low Power code M.*
- (10) *Available only with output code W - Profibus PA.*
- (11) *The T1 option is not needed with FISCO Product Certifications, transient protection is included with the FISCO Product Certification code IA.*
- (12) *Only valid with FOUNDATION fieldbus Output Code F.*
- (13) *Not available with FOUNDATION fieldbus (Output Code F) or Profibus (Output Code W).*
- (14) *NAMUR-Compliant operation is pre-set at the factory and cannot be changed to standard operation in the field.*
- (15) *The V5 option is not needed with the T1 option; external ground screw assembly is included with the T1 option.*

## Rosemount 3051L Liquid Level Transmitter



3051L Liquid Level Transmitter

Rosemount 3051 liquid level transmitters combine the features and benefits of a 3051 transmitter with the durability and reliability of a direct mount seal all in a single model number.

Level transmitters can also be ordered with an additional 1199 remote seal to form a Tuned-System Assembly that offers improved performance and reduced costs compared to traditional symmetrical (balanced) assemblies.

Product features and capabilities include:

- Variety of process connections
- Quantified performance for the entire transmitter / seal assembly (QZ option)
- 4-20 mA HART, 1-5 Vdc HART low power, FOUNDATION fieldbus, and Profibus PA protocols

### Additional Information

Specifications: page 35

Certifications: page 44

Dimensional Drawings: page 49

Table 6. Rosemount 3051L Liquid Level Transmitter Ordering Information

★ The Standard offering represents the most common options. The starred options (★) should be selected for best delivery.

The Expanded offering is subject to additional delivery lead time.

Model	Transmitter Type			
3051L	Liquid Level Transmitter			
<b>Pressure Range</b>				
<b>Standard</b>				<b>Standard</b>
2	-250 to 250 inH <sub>2</sub> O (-0,6 to 0,6 bar)			★
3	-1000 to 1000 inH <sub>2</sub> O (-2,5 to 2,5 bar)			★
4	-300 to 300 psi (-20,7 to 20,7 bar)			★
<b>Transmitter Output</b>				
<b>Standard</b>				<b>Standard</b>
A	4-20 mA with Digital Signal Based on <i>HART</i> Protocol			★
F	FOUNDATION fieldbus Protocol			★
W <sup>(1)</sup>	Profibus PA Protocol			★
<b>Expanded</b>				
M	Low-Power 1-5 V dc with Digital Signal Based on <i>HART</i> Protocol (See Option Code C2 for 0.8-3.2 V dc Output)			
<b>Process Connection Size, Material, Extension length (High Side)</b>				
<b>Standard</b>				<b>Standard</b>
<b>Code</b>	<b>Process Connection Size</b>	<b>Material</b>	<b>Extension Length</b>	★
G0 <sup>(2)</sup>	2-in./DN 50	316L SST	Flush Mount Only	★
H0 <sup>(2)</sup>	2-in./DN 50	Alloy C-276	Flush Mount Only	★
J0	2-in./DN 50	Tantalum	Flush Mount Only	★
A0 <sup>(2)</sup>	3-in./DN 80	316L SST	Flush Mount	★
A2 <sup>(2)</sup>	3-in./DN 80	316L SST	2-in./50 mm	★
A4 <sup>(2)</sup>	3-in./DN 80	316L SST	4-in./100 mm	★
A6 <sup>(2)</sup>	3-in./DN 80	316L SST	6-in./150 mm	★
B0 <sup>(2)</sup>	4-in./DN 100	316L SST	Flush Mount	★
B2 <sup>(2)</sup>	4-in./DN 100	316L SST	2-in./50 mm	★
B4 <sup>(2)</sup>	4-in./DN 100	316L SST	4-in./100 mm	★

# Rosemount 3051

Table 6. Rosemount 3051L Liquid Level Transmitter Ordering Information

★ The Standard offering represents the most common options. The starred options (★) should be selected for best delivery.  
The Expanded offering is subject to additional delivery lead time.

B6 <sup>(2)</sup>	4-in./DN 100	316L SST	6-in./150 mm	★
C0 <sup>(2)</sup>	3-in./DN 80	Alloy C-276	Flush Mount	★
C2 <sup>(2)</sup>	3-in./DN 80	Alloy C-276	2-in./50 mm	★
C4 <sup>(2)</sup>	3-in./DN 80	Alloy C-276	4-in./100 mm	★
C6 <sup>(2)</sup>	3-in./DN 80	Alloy C-276	6-in./150 mm	★
D0 <sup>(2)</sup>	4-in./DN 100	Alloy C-276	Flush Mount	★
D2 <sup>(2)</sup>	4-in./DN 100	Alloy C-276	2-in./50 mm	★
D4 <sup>(2)</sup>	4-in./DN 100	Alloy C-276	4-in./100 mm	★
D6 <sup>(2)</sup>	4-in./DN 100	Alloy C-276	6-in./150 mm	★
E0	3-in./DN 80	Tantalum	Flush Mount Only	★
F0	4-in./DN 100	Tantalum	Flush Mount Only	★
<b>Mounting Flange Size, Rating, Material (High Side)</b>				
	<b>Size</b>	<b>Rating</b>	<b>Material</b>	
<b>Standard</b>				<b>Standard</b>
M	2-in.	ANSI/ASME B16.5 Class 150	CS	★
A	3-in.	ANSI/ASME B16.5 Class 150	CS	★
B	4-in.	ANSI/ASME B16.5 Class 150	CS	★
N	2-in.	ANSI/ASME B16.5 Class 300	CS	★
C	3-in.	ANSI/ASME B16.5 Class 300	CS	★
D	4-in.	ANSI/ASME B16.5 Class 300	CS	★
P	2-in.	ANSI/ASME B16.5 Class 600	CS	★
E	3-in.	ANSI/ASME B16.5 Class 600	CS	★
X <sup>(2)</sup>	2-in.	ANSI/ASME B16.5 Class 150	SST	★
F <sup>(2)</sup>	3-in.	ANSI/ASME B16.5 Class 150	SST	★
G <sup>(2)</sup>	4-in.	ANSI/ASME B16.5 Class 150	SST	★
Y <sup>(2)</sup>	2-in.	ANSI/ASME B16.5 Class 300	SST	★
H <sup>(2)</sup>	3-in.	ANSI/ASME B16.5 Class 300	SST	★
J <sup>(2)</sup>	4-in.	ANSI/ASME B16.5 Class 300	SST	★
Z <sup>(2)</sup>	2-in.	ANSI/ASME B16.5 Class 600	SST	★
L <sup>(2)</sup>	3-in.	ANSI/ASME B16.5 Class 600	SST	★
Q	DN 50	PN 10-40 per EN 1092-1	CS	★
R	DN 80	PN 40 per EN 1092-1	CS	★
S	DN 100	PN 40 per EN 1092-1	CS	★
V	DN 100	PN 10/16 per EN 1092-1	CS	★
K <sup>(2)</sup>	DN 50	PN 10-40 per EN 1092-1	SST	★
T <sup>(2)</sup>	DN 80	PN 40 per EN 1092-1	SST	★
U <sup>(2)</sup>	DN 100	PN 40 per EN 1092-1	SST	★
W <sup>(2)</sup>	DN 100	PN 10/16 per EN 1092-1	SST	★
7 <sup>(2)</sup>	4 in.	ANSI/ASME B16.5 Class 600	SST	★
<b>Expanded</b>				
1	—	10K per JIS B2238	CS	
2	—	20K per JIS B2238	CS	
3	—	40K per JIS B2238	CS	
4 <sup>(2)</sup>	—	10K per JIS B2238	316 SST	
5 <sup>(2)</sup>	—	20K per JIS B2238	316 SST	
6 <sup>(2)</sup>	—	40K per JIS B2238	316 SST	

# Product Data Sheet

00813-0100-4001, Rev LA

November 2010

# Rosemount 3051

Table 6. Rosemount 3051L Liquid Level Transmitter Ordering Information

★ The Standard offering represents the most common options. The starred options (★) should be selected for best delivery.  
The Expanded offering is subject to additional delivery lead time.

Seal Fill Fluid (High Side)		Specific Gravity	Temperature Limits (Ambient Temperature of 70° F (21° C))			
<b>Standard</b>					<b>Standard</b>	
A	Syltherm XLT	0.85	-102 to 293 °F (-75 to 145 °C)			★
C	Silicone 704	1.07	32 to 401 °F (0 to 205 °C)			★
D	Silicone 200	0.93	-49 to 401 °F (-45 to 205 °C)			★
H	Inert (Halocarbon)	1.85	-49 to 320 °F (-45 to 160 °C)			★
G	Glycerine and Water	1.13	5 to 203 °F (-15 to 95 °C)			★
N	Neobee M-20	0.92	5 to 401 °F (-15 to 205 °C)			★
P	Propylene Glycol and Water	1.02	5 to 203 F (-15 to 95 °C)			★
<b>Low Pressure Side</b>						
	Configuration	Flange Adapter	Diaphragm Material	Sensor Fill Fluid		
<b>Standard</b>					<b>Standard</b>	
11 <sup>(2)</sup>	Gage	SST	316L SST	Silicone		★
21 <sup>(2)</sup>	Differential	SST	316L SST	Silicone		★
22 <sup>(2)</sup>	Differential	SST	Alloy C-276	Silicone		★
2A <sup>(2)</sup>	Differential	SST	316L SST	Inert (Halocarbon)		★
2B <sup>(2)</sup>	Differential	SST	Alloy C-276	Inert (Halocarbon)		★
31 <sup>(2)</sup>	Tuned-System Assembly with Remote Seal	None	316L SST	Silicone <i>(Requires Option Code S1)</i>		★
<b>O-ring</b>						
<b>Standard</b>					<b>Standard</b>	
A	Glass-filled PTFE				★	
<b>Housing Material</b>			<b>Conduit Entry Size</b>			
<b>Standard</b>					<b>Standard</b>	
A	Aluminum		½–14 NPT			★
B	Aluminum		M20 × 1.5			★
J	SST		½–14 NPT			★
K	SST		M20 × 1.5			★
<b>Expanded</b>						
D	Aluminum		G½			
M	SST		G½			

## Options (Include with selected model number)

<b>PlantWeb Control Functionality</b>	
<b>Standard</b>	
A01 <sup>(3)</sup>	FOUNDATION fieldbus Advanced Control Function Block Suite
<b>PlantWeb Diagnostic Functionality</b>	
<b>Standard</b>	
D01 <sup>(3)</sup>	FOUNDATION fieldbus Diagnostics Suite
<b>Seal Assemblies</b>	
<b>Standard</b>	
S1 <sup>(4)</sup>	Assembled to One Rosemount 1199 Seal (Requires 1199M)

# Rosemount 3051

Table 6. Rosemount 3051L Liquid Level Transmitter Ordering Information

★ The Standard offering represents the most common options. The starred options (★) should be selected for best delivery.  
The Expanded offering is subject to additional delivery lead time.

<b>Product Certifications</b>		
<b>Standard</b>		<b>Standard</b>
E5	FM Explosion-proof, Dust Ignition-proof	★
I5	FM Intrinsically Safe, Division 2	★
K5	FM Explosion-proof, Dust Ignition-proof, Intrinsically Safe, and Division 2	★
I1 <sup>(5)</sup>	ATEX Intrinsic Safety and Dust	★
N1 <sup>(5)</sup>	ATEX Type n Certification and Dust	★
E8	ATEX Flameproof and Dust Certification	★
E4 <sup>(5)</sup>	TIIS Flameproof	★
C6	CSA Explosion-proof, Dust Ignition-proof, Intrinsically Safe, and Division 2	★
K6 <sup>(5)</sup>	CSA and ATEX Explosion-proof, Intrinsically Safe, and Division 2 (combination of C6 and K8)	★
KB	FM and CSA Explosion-proof, Dust Ignition-proof, Intrinsically Safe, and Division 2 (combination of K5 and C6)	★
K7 <sup>(5)</sup>	IECEX Flameproof, Dust Ignition-proof, Intrinsic Safety, and Type n (combination of I7, N7 and E7)	★
K8 <sup>(5)</sup>	ATEX Flame-proof and Intrinsic Safety Approvals (combination of I1 and E8)	★
KD <sup>(5)</sup>	FM, CSA, and ATEX Explosion-proof, Intrinsically Safe (combination of K5, C6, I1, and E8)	★
I7 <sup>(5)</sup>	IECEX Intrinsic Safety	★
E7 <sup>(5)</sup>	IECEX Flameproof, Dust Ignition-proof	★
N7 <sup>(5)</sup>	IECEX Type n Certification	★
IA	ATEX FISCO Intrinsic Safety	★
IE	FM FISCO Intrinsically Safe	★
E2	INMETRO Flameproof	★
I2	INMETRO Intrinsic Safety	★
K2	INMETRO Flameproof, Intrinsic Safety	★
E3	China Flameproof	★
I3	China Intrinsic Safety	★
N3	China Type n	★
<b>Shipboard Approvals</b>		
<b>Standard</b>		<b>Standard</b>
SBS	American Bureau of Shipping	★
<b>Bolting Material</b>		
<b>Standard</b>		<b>Standard</b>
L4	Austenitic 316 SST Bolts	★
L5	ASTM A 193, Grade B7M bolts	★
L6	Alloy K-500 Bolts	★
L8	ASTM A 193 Class 2, Grade B8M Bolts	★
<b>Display and Interface Options</b>		
<b>Standard</b>		<b>Standard</b>
M4 <sup>(6)</sup>	LCD Display with Local Operator Interface	★
M5	LCD Display for Aluminum Housing (Housing Codes A, B, C, and D only)	★
M6	LCD Display for SST Housing (Housing Codes J, K, L, and M only)	★
<b>Calibration Certification</b>		
<b>Standard</b>		<b>Standard</b>
Q4	Calibration Certificate	★
QP	Calibration Certificate and tamper evident seal	★
QG	Calibration Certificate and GOST Verification Certificate	★
<b>Material Traceability Certification</b>		
<b>Standard</b>		<b>Standard</b>
Q8	Material Traceability Certification per EN 10204 3.1	★
<b>Quality Certification for Safety</b>		
<b>Standard</b>		<b>Standard</b>
QS <sup>(7)</sup>	Prior-use certificate of FMEDA data	★



# Product Data Sheet

00813-0100-4001, Rev LA

November 2010

# Rosemount 3051

Table 6. Rosemount 3051L Liquid Level Transmitter Ordering Information

★ The Standard offering represents the most common options. The starred options (★) should be selected for best delivery.  
The Expanded offering is subject to additional delivery lead time.

Toolkit Total System Performance Reports				
<b>Standard</b>				<b>Standard</b>
QZ	Remote Seal System Performance Calculation Report			★
Conduit Electrical Connector				
<b>Standard</b>				<b>Standard</b>
GE	M12, 4-pin, Male Connector (eurofast <sup>®</sup> )			★
GM	A size Mini, 4-pin, Male Connector (minifast <sup>®</sup> )			★
Hardware Adjustments				
<b>Standard</b>				<b>Standard</b>
J1 <sup>(8)(9)</sup>	Local Zero Adjustment Only			★
J3 <sup>(8)(9)</sup>	No Local Zero or Span Adjustment			★
Transient Protection				
<b>Standard</b>				<b>Standard</b>
T1 <sup>(10)</sup>	Transient Protection Terminal Block			★
Software Configuration				
<b>Standard</b>				<b>Standard</b>
C1 <sup>(8)</sup>	Custom Software Configuration (Completed CDS 00806-0100-4001 required with order)			★
Low Power Output				
<b>Standard</b>				<b>Standard</b>
C2 <sup>(8)</sup>	0.8–3.2 V dc Output with Digital Signal Based on HART Protocol (Available with Output code M only)			★
Alarm Limit				
<b>Standard</b>				<b>Standard</b>
C4 <sup>(8)(11)</sup>	NAMUR alarm and saturation levels, high alarm			★
CN <sup>(8)(11)</sup>	NAMUR alarm and saturation levels, low alarm			★
Conduit Plug				
<b>Standard</b>				<b>Standard</b>
DO	316 SST Conduit Plug			★
Ground Screw				
<b>Standard</b>				<b>Standard</b>
V5 <sup>(12)</sup>	External Ground Screw Assembly			★
Lower Housing Flushing Connection Options				
	Ring Material	Number	Size (NPT)	
<b>Standard</b>				<b>Standard</b>
F1	316 SST	1	1/4-18 NPT	★
F2	316 SST	2	1/4-18 NPT	★
F3	Alloy C-276	1	1/4-18 NPT	★
F4	Alloy C-276	2	1/4-18 NPT	★
F7	316 SST	1	1/2-14 NPT	★
F8	316 SST	2	1/2-14 NPT	★
F9	Alloy C-276	1	1/2-14 NPT	★
F0	Alloy C-276	2	1/2-14 NPT	★
<b>Typical Model Number: 3051L 2 A A0 D 21 A A F1</b>				

(1) Option code M4 - LCD Display with Local Operator Interface required for local addressing and configuration.

# Rosemount 3051

---

- (2) *Materials of Construction comply with metallurgical requirements highlighted within NACE MR0175/ISO 15156 for sour oil field production environments. Environmental limits apply to certain materials. Consult latest standard for details. Selected materials also conform to NACE MR0103 for sour refining environments.*
- (3) *Only valid with FOUNDATION fieldbus Output Code F.*
- (4) *"Assemble-to" items are specified separately and require a completed model number.*
- (5) *Not available with low-power Option Code M*
- (6) *Available only with output code W - Profibus PA.*
- (7) *Only available with HART 4-20 mA output (output code A).*
- (8) *Not available with fieldbus (output code F) or profibus protocols (output code W).*
- (9) *Local zero and span adjustments are standard unless Option Code J1 or J3 is specified.*
- (10) *The T1 option is not needed with FISCO Product Certifications; transient protection is included in the FISCO product certification codes IA, IE, IF, and IG.*
- (11) *NAMUR-Compliant operation is pre-set at the factory and cannot be changed to standard operation in the field.*
- (12) *The V5 option is not needed with the T1 option; external ground screw assembly is included with the T1 option.*

## Specifications

### PERFORMANCE SPECIFICATIONS

This product data sheet covers HART, FOUNDATION fieldbus and Profibus PA protocols unless specified.

### Conformance To Specification ( $\pm 3\sigma$ (Sigma))

Technology leadership, advanced manufacturing techniques and statistical process control ensure specification conformance to at least  $\pm 3\sigma$ .

### Reference Accuracy

Stated reference accuracy equations include terminal based linearity, hysteresis, and repeatability.

For FOUNDATION fieldbus and Profibus PA devices, use calibrated range in place of span.

Models	Standard	High Accuracy Option
<b>3051C</b> Ranges 2-5	$\pm 0.065\%$ of span For spans less than 10:1,  accuracy = $\pm \left[ 0.015 + 0.005 \left( \frac{URL}{Span} \right) \right] \%$ of Span	Ranges 2-5 High Accuracy Option, P8 $\pm 0.04\%$ of span For spans less than 5:1,  accuracy = $\pm \left[ 0.015 + 0.005 \left( \frac{URL}{Span} \right) \right] \%$ of Span
	Range 1  $\pm 0.10\%$ of span For spans less than 15:1,  accuracy = $\pm \left[ 0.025 + 0.005 \left( \frac{URL}{Span} \right) \right] \%$ of Span	
	Range 0 (CD)  $\pm 0.10\%$ of span For spans less than 2:1, accuracy = $\pm 0.05\%$ of URL	
<b>3051CA</b> Ranges 1-4	$\pm 0.065\%$ of span For spans less than 10:1,  accuracy = $\pm \left[ 0.0075 \left( \frac{URL}{Span} \right) \right] \%$ of Span	Ranges 2-4 High Accuracy Option, P8 $\pm 0.04\%$ of span For spans less than 5:1,  accuracy = $\pm \left[ 0.0075 \left( \frac{URL}{Span} \right) \right] \%$ of Span
	<b>3051T</b> Ranges 1-4  $\pm 0.065\%$ of span For spans less than 10:1,  accuracy = $\pm \left[ 0.0075 \left( \frac{URL}{Span} \right) \right] \%$ of Span	Ranges 2-4 High Accuracy Option, P8 $\pm 0.04\%$ of span For spans less than 5:1,  accuracy = $\pm \left[ 0.0075 \left( \frac{URL}{Span} \right) \right] \%$ of Span
Range 5	$\pm 0.075\%$ of span For spans less than 10:1,  accuracy = $\pm \left[ 0.0075 \left( \frac{URL}{Span} \right) \right] \%$ of Span	
	<b>3051L</b> Ranges 2-4  $\pm 0.075\%$ of span For spans less than 10:1,  accuracy = $\pm \left[ 0.025 + 0.005 \left( \frac{URL}{Span} \right) \right] \%$ of Span	

### Flow Performance - Flow Reference Accuracy

3051CFA Annubar Flowmeter		
Ranges 2-3		±1.60% of Flow Rate at 8:1 flow turndown
3051CFC Compact Orifice Flowmeter – Conditioning Option C		
Ranges 2-3	$\beta = 0.4$	±1.75% of Flow Rate at 8:1 flow turndown
	$\beta = 0.65$	±1.95% of Flow Rate at 8:1 flow turndown
3051CFC Compact Orifice Flowmeter – Orifice Type Option P <sup>(1)</sup>		
Ranges 2-3	$\beta = 0.4$	±2.00% of Flow Rate at 8:1 flow turndown
	$\beta = 0.65$	±2.00% of Flow Rate at 8:1 flow turndown
3051CFP Integral Orifice Flowmeter		
Ranges 2-3	$\beta < 0.1$	±3.00% of Flow Rate at 8:1 flow turndown
	$0.1 < \beta < 0.2$	±1.95% of Flow Rate at 8:1 flow turndown
	$0.2 < \beta < 0.6$	±1.75% of Flow Rate at 8:1 flow turndown
	$0.6 < \beta < 0.8$	±2.15% of Flow Rate at 8:1 flow turndown

(1) For smaller line sizes, see Rosemount Compact Orifice

### Total Performance

Total Performance is based on combined errors of reference accuracy, ambient temperature effect, and static pressure effect.

For ±50 °F (28 °C) temperature changes, up to 1000 psi (6.9 MPa) line pressure (CD only), from 1:1 to 5:1 rangedown.

Models	Total Performance
3051C Ranges 2-5	±0.15% of span
3051T Ranges 1-4	±0.15% of span

### Long Term Stability

Models	Long Term Stability
3051C Ranges 2-5	±0.125% of URL for 5 years ±50 °F (28 °C) temperature changes, and up to 1000 psi (6.9 MPa) line pressure.
3051CD, 3051CG Low/Draft Range Ranges 0-1	±0.2% of URL for 1 year
3051CA Low Range Range 1	±0.125% of URL for 5 years ±50 °F (28 °C) temperature changes, and up to 1000 psi (6.9 MPa) line pressure.
3051T Ranges 1-5	±0.125% of URL for 5 years ±50 °F (28 °C) temperature changes, and up to 1000 psi (6.9 MPa) line pressure.

### Dynamic Performance

	4 - 20 mA HART <sup>(1)</sup> 1-5 Vdc HART Low Power	FOUNDATION fieldbus and Profibus PA protocols <sup>(3)</sup>	Typical HART Transmitter Response Time
<b>Total Response Time (<math>T_d + T_c</math>)<sup>(2)</sup>:</b>			<p><b>Transmitter Output vs. Time</b></p> <p>Pressure Released</p> <p>100% 36.8% 0%</p> <p>Time</p> <p><math>T_d = \text{Dead Time}</math> <math>T_c = \text{Time Constant}</math> Response Time = <math>T_d + T_c</math></p> <p>63.2% of Total Step Change</p>
3051C, Ranges 2-5:	100 ms	152 ms	
Range 1:	255 ms	307 ms	
Range 0:	700 ms	N/A	
3051T:	100 ms	152 ms	
3051L:	See Instrument Toolkit <sup>®</sup>	See Instrument Toolkit	
<b>Dead Time (<math>T_d</math>)</b>	45 ms (nominal)	97 ms	
<b>Update Rate</b>	22 times per second	22 times per second	
<p>(1) Dead time and update rate apply to all models and ranges; analog output only                  (2) Nominal total response time at 75 °F (24 °C) reference conditions.                  (3) Transducer block response time, Analog Input block execution time not included.</p>			

**Line Pressure Effect per 1000 psi (6,9 MPa)**

For line pressures above 2000 psi (13,7 MPa) and Ranges 4-5, see user manual (Document number 00809-0100-4001 for HART, 00809-0100-4774 for FOUNDATION fieldbus, and 00809-0100-4797 for Profibus PA).

Models	Line Pressure Effect
<b>3051CD, 3051CF</b>	Zero Error <sup>(1)</sup>
Ranges 2-3	±0.05% of URL/1000 psi (68,9 bar) for line pressures from 0 to 2000 psi (0 to 13,7 MPa)
Range 1	±0.25% of URL/1000 psi (68,9 bar)
Range 0	±0.125% of URL/100 psi (6,89 bar)
	Span Error
Ranges 2-3	±0.1% of reading/1000 psi (68,9 bar)
Range 1	±0.4% of reading/1000 psi (68,9 bar)
Range 0	±0.15% of reading/100 psi (6,89 bar)

(1) Can be calibrated out at line pressure.

**Ambient Temperature Effect per 50°F (28°C)**

Models	Ambient Temperature Effect
<b>3051C</b>	
Ranges 2-5	±(0.0125% URL + 0.0625% span) from 1:1 to 5:1 ±(0.025% URL + 0.125% span) from 5:1 to 100:1
Range 1	±(0.1% URL + 0.25% span) from 1:1 to 30:1
Range 0	±(0.25% URL + 0.05% span) from 1:1 to 30:1
<b>3051CA</b>	
Ranges 1-4	±(0.025% URL + 0.125% span) from 1:1 to 30:1 ±(0.035% URL + 0.125% span) from 30:1 to 100:1
<b>3051T</b>	
Range 2-4	±(0.025% URL + 0.125% span) from 1:1 to 30:1 ±(0.035% URL + 0.125% span) from 30:1 to 100:1
Range 1	±(0.025% URL + 0.125% span) from 1:1 to 10:1 ±(0.05% URL + 0.125% span) from 10:1 to 100:1
Range 5	±(0.1% URL + 0.15% span)
<b>3051L</b>	See Instrument Toolkit software.

**Mounting Position Effects**

Models	Mounting Position Effects
<b>3051C</b>	Zero shifts up to ±1.25 inH <sub>2</sub> O (3,11 mbar), which can be calibrated out. No span effect.
<b>3051CA, 3051T</b>	Zero shifts up to 2.5 inH <sub>2</sub> O (6,22 mbar), which can be calibrated out. No span effect.
<b>3051L</b>	With liquid level diaphragm in vertical plane, zero shift of up to 1 inH <sub>2</sub> O (2,49 mbar). With diaphragm in horizontal plane, zero shift of up to 5 inH <sub>2</sub> O (12,43 mbar) plus extension length on extended units. All zero shifts can be calibrated out. No span effect.

**Vibration Effect**

Less than ±0.1% of URL when tested per the requirements of IEC60770-1 field or pipeline with high vibration level (10-60 Hz 0.21 mm displacement peak amplitude / 60-2000 Hz 3g).

**Power Supply Effect**

Less than ±0.005% of calibrated span per volt.

**Electromagnetic Compatibility (EMC)**

Meets all relevant requirements of EN 61326 and Namur NE-21.

**Transient Protection (Option Code T1)**

Meets IEEE C62.41, Category Location B

- 6 kV crest (0.5 μs - 100 kHz)
- 3 kV crest (8 × 20 microseconds)
- 6 kV crest (1.2 × 50 microseconds)

# Rosemount 3051

## FUNCTIONAL SPECIFICATIONS

### Range and Sensor Limits

Table 7. 3051CD, 3051CG, 3051CF, and 3051L Range and Sensor Limits

Range	Minimum Span		Range and Sensor Limits			
	3051CD <sup>(1)</sup> , 3051CG, 3051CF, 3051L	Upper (URL)	Lower (LRL)			
			3051CD Differential 3051CF Flowmeters	3051CG Gage	3051L Differential	3051L Gage
0	0.1 inH <sub>2</sub> O (0,25 mbar)	3.0 inH <sub>2</sub> O (7,47 mbar)	-3.0 inH <sub>2</sub> O (-7,47 mbar)	NA	NA	NA
1	0.5 inH <sub>2</sub> O (1,2 mbar)	25 inH <sub>2</sub> O (62,3 mbar)	-25 inH <sub>2</sub> O (-62,1 mbar)	-25 inH <sub>2</sub> O (-62,1 mbar)	NA	NA
2	2.5 inH <sub>2</sub> O (6,2 mbar)	250 inH <sub>2</sub> O (0,62 bar)	-250 inH <sub>2</sub> O (-0,62 bar)	-250 inH <sub>2</sub> O (-0,62 bar)	-250 inH <sub>2</sub> O (-0,62 bar)	-250 inH <sub>2</sub> O (-0,62 bar)
3	10 inH <sub>2</sub> O (24,9 mbar)	1000 inH <sub>2</sub> O (2,49 bar)	-1000 inH <sub>2</sub> O (-2,49 bar)	0.5 psia (34,5 mbar abs)	-1000 inH <sub>2</sub> O (-2,49 bar)	0.5 psia (34,5 mbar abs)
4	3 psi (0,20 bar)	300 psi (20,6 bar)	-300 psi (-20,6 bar)	0.5 psia (34,5 mbar abs)	-300 psi (-20,6 bar)	0.5 psia (34,5 mbar abs)
5	20 psi (1,38 bar)	2000 psi (137,9 bar)	-2000 psi (-137,9 bar)	0.5 psia (34,5 mbar abs)	NA	NA

(1) Range 0 only available with 3051CD. Range 1 only available with 3051CD, 3051CG, or 3051CF.

Table 8. Range and Sensor Limits

Range	3051CA			Range	3051T			
	Minimum Span	Range and Sensor Limits			Minimum Span	Range and Sensor Limits		Lower <sup>(1)</sup> (LRL) (Gage)
		Upper (URL)	Lower (LRL)			Upper (URL)	Lower (LRL)	
1	0.3 psia (20,6 mbar)	30 psia (2,07 bar)	0 psia (0 bar)	1	0.3 psi (20,6 mbar)	30 psi (2,07 bar)	0 psia (0 bar)	-14.7 psig (-1,01 bar)
2	1.5 psia (0,103 bar)	150 psia (10,3 bar)	0 psia (0 bar)	2	1.5 psi (0,103 bar)	150 psi (10,3 bar)	0 psia (0 bar)	-14.7 psig (-1,01 bar)
3	8 psia (0,55 bar)	800 psia (55,2 bar)	0 psia (0 bar)	3	8 psi (0,55 bar)	800 psi (55,2 bar)	0 psia (0 bar)	-14.7 psig (-1,01 bar)
4	40 psia (2,76 bar)	4000 psia (275,8 bar)	0 psia (0 bar)	4	40 psi (2,76 bar)	4000 psi (275,8 bar)	0 psia (0 bar)	-14.7 psig (-1,01 bar)
				5	2000 psi (137,9 bar)	10000 psi (689,4 bar)	0 psia (0 bar)	-14.7 psig (-1,01 bar)

(1) Assumes atmospheric pressure of 14.7 psig.

## Service

Liquid, gas, and vapor applications

### 4-20 mA HART (Output Code A)

#### Output

Two-wire 4-20 mA, user-selectable for linear or square root output.  
Digital process variable superimposed on 4-20 mA signal,  
available to any host that conforms to the HART protocol.


#### Power Supply

External power supply required. Standard transmitter (4-20 mA)  
operates on 10.5 to 55 V dc with no load.

**Load Limitations**

Maximum loop resistance is determined by the voltage level of the external power supply, as described by:

Max. Loop Resistance = 43.5 (Power Supply Voltage – 10.5)

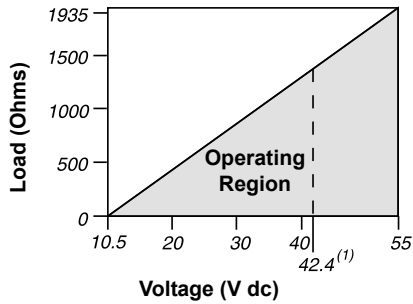

Communication requires a minimum loop resistance of 250 ohms.

(1) For CSA approval, power supply must not exceed 42.4 V.

**Zero and Span Adjustment Requirements**

Zero and span values can be set anywhere within the range limits stated in Table 7 and Table 8.

Span must be greater than or equal to the minimum span stated in Table 7 and Table 8.

**Indication**

Optional two line LCD display

**FOUNDATION fieldbus (Output code F)**

**Power Supply**

External power supply required; transmitters operate on 9.0 to 32.0 V dc transmitter terminal voltage.

**Current Draw**

17.5 mA for all configurations (including LCD display option)

**Indication**

Optional two line LCD display

**FOUNDATION fieldbus Function Block**

**Execution Times**

Block	Execution Time
Resource	-
Transducer	-
LCD Block	-
Analog Input 1, 2	30 milliseconds
PID	45 milliseconds
Input Selector	30 milliseconds
Arithmetic	35 milliseconds
Signal Characterizer	40 milliseconds
Integrator	35 milliseconds

**FOUNDATION fieldbus Parameters**

Schedule Entries	7 (max.)
Links	20 (max.)
Virtual Communications Relationships (VCR)	12 (max.)

**Standard Function Blocks**

**Resource Block**

Contains hardware, electronics, and diagnostic information.

**Transducer Block**

Contains actual sensor measurement data including the sensor diagnostics and the ability to trim the pressure sensor or recall factory defaults.

**LCD Block**

Configures the local display.

**2 Analog Input Blocks**

Processes the measurements for input into other function blocks. The output value is in engineering units or custom and contains a status indicating measurement quality.

**PID Block**

Contains all logic to perform PID control in the field including cascade and feedforward.

**Backup Link Active Scheduler (LAS)**

The transmitter can function as a Link Active Scheduler if the current link master device fails or is removed from the segment.

**Advanced Control Function Block Suite (Option Code A01)**

**Input Selector Block**

Selects between inputs and generates an output using specific selection strategies such as minimum, maximum, midpoint, average or first "good."

**Arithmetic Block**

Provides pre-defined application-based equations including flow with partial density compensation, electronic remote seals, hydrostatic tank gauging, ratio control and others.

**Signal Characterizer Block**

Characterizes or approximates any function that defines an input/output relationship by configuring up to twenty X, Y coordinates. The block interpolates an output value for a given input value using the curve defined by the configured coordinates.

**Integrator Block**

Compares the integrated or accumulated value from one or two variables to pre-trip and trip limits and generates discrete output signals when the limits are reached. This block is useful for calculating total flow, total mass, or volume over time.

# Rosemount 3051

## FOUNDATION fieldbus Diagnostics Suite (Option Code D01)

The 3051C FOUNDATION fieldbus Diagnostics provide Abnormal Situation Prevention (ASP) indication. The integral statistical process monitoring (SPM) technology calculates the mean and standard deviation of the process variable 22 times per second. The 3051C ASP algorithm uses these values and highly flexible configuration options for customization to many user-defined or application specific abnormal situations. The detection of plugged impulse lines is the first available predefined application.

## Profibus PA (Output Code W)

### Profile Version

3.02

### Power Supply

External power supply required; transmitters operate on 9.0 to 32.0 V dc transmitter terminal voltage.

### Current Draw

17.5 mA for all configurations (including LCD display option)

### Output Update Rate

Four times per second

## Standard Function Blocks

### Analog Input (AI Block)

The AI function block processes the measurements and makes them available to the host device. The output value from the AI block is in engineering units and contains a status indicating the quality of the measurement.

### Physical Block

The physical block defines the physical resources of the device including type of memory, hardware, electronics and diagnostic information.

### Transducer Block

Contains actual sensor measurement data including the sensor diagnostics and the ability to trim the pressure sensor or recall factory defaults.

## Indication

Optional two line LCD display

## Local Operator Interface

Optional external configuration buttons

## 1-5 Vdc HART Low Power (Output Code M)

### Output

Three wire 1-5 V dc or 0.8-3.2 V dc (Option Code C2) user-selectable output. Also user selectable for linear or square root output configuration. Digital process variable superimposed on voltage signal, available to any host conforming to the HART protocol. Low-power transmitter operates on 6-12 V dc with no load.

### Power Consumption

3.0 mA, 18-36 mW

### Minimum Load Impedance

100 k $\Omega$  ( $V_{out}$  wiring)

### Indication

Optional 5-digit LCD display

## Overpressure Limits

### Rosemount 3051CD/CG/CF

- Range 0: 750 psi (51,7 bar)
- Range 1: 2000 psig (137,9 bar)
- Ranges 2-5: 3626 psig (250 bar)  
4500 psig (310,3 bar) for option code P9

### Rosemount 3051CA

- Range 1: 750 psia (51,7 bar)
- Range 2: 1500 psia (103,4 bar)
- Range 3: 1600 psia (110,3 bar)
- Range 4: 6000 psia (413,7 bar)

### Rosemount 3051TG/TA

- Range 1: 750 psi (51,7 bar)
- Range 2: 1500 psi (103,4 bar)
- Range 3: 1600 psi (110,3 bar)
- Range 4: 6000 psi (413,7 bar)
- Range 5: 15000 psi (1034,2 bar)

For 3051L or Level Flange Option Codes FA, FB, FC, FD, FP, and FQ, limit is 0 psia to the flange rating or sensor rating, whichever is lower.

Table 9. 3051L and Level Flange Rating Limits

Standard	Type	CS Rating	SST Rating
ANSI/ASME	Class 150	285 psig	275 psig
ANSI/ASME	Class 300	740 psig	720 psig
ANSI/ASME	Class 600	1480 psig	1440 psig
<i>At 100 °F (38 °C), the rating decreases with increasing temperature, per ANSI/ASME B16.5.</i>			
DIN	PN 10-40	40 bar	40 bar
DIN	PN 10/16	16 bar	16 bar
DIN	PN 25/40	40 bar	40 bar
<i>At 248 °F (120 °C), the rating decreases with increasing temperature, per DIN 2401.</i>			



## Static Pressure Limit

### Rosemount 3051CD Only

Operates within specifications between static line pressures of 0.5 psia and 3626 psig (4500 psig (310, 3 bar) for Option Code P9).

Range 0: 0.5 psia and 750 psig (3, 4 bar and 51, 7 bar)

Range 1: 0.5 psia and 2000 psig (3, 4 bar and 137, 9 bar)

## Burst Pressure Limits

### 3051C, 3051CF Coplanar or Traditional process flange

10000 psig (69 MPa)

### 3051T Inline

Ranges 1-4: 11000 psi (75,8 MPa)

Range 5: 26000 psig (179 MPa)

## Failure Mode Alarm

If self-diagnostics detect a sensor or microprocessor failure, the analog signal is driven either high or low to alert the user. High or low failure mode is user-selectable with a jumper on the transmitter. The values to which the transmitter drives its output in failure mode depend on whether it is factory-configured to *standard* or *NAMUR-compliant* operation. The values for each are as follows:

Standard Operation			
Output Code	Linear Output	Fail High	Fail Low
A	$3.9 \leq I \leq 20.8$	$I \geq 21.75 \text{ mA}$	$I \leq 3.75 \text{ mA}$
M	$0.97 \leq V \leq 5.2$	$V \geq 5.4 \text{ V}$	$V \leq 0.95 \text{ V}$

NAMUR-Compliant Operation			
Output Code	Linear Output	Fail High	Fail Low
A	$3.8 \leq I \leq 20.5$	$I \geq 22.5 \text{ mA}$	$I \leq 3.6 \text{ mA}$

## Output Code F and W

If self-diagnostics detect a gross transmitter failure, that information gets passed as a status along with the process variable.

## Temperature Limits

### Ambient

-40 to 185 °F (-40 to 85 °C)

With LCD display<sup>(1)</sup>: -40 to 175 °F (-40 to 80 °C)

### Storage

-50 to 230 °F (-46 to 110 °C)

With LCD display: -40 to 185 °F (-40 to 85 °C)

### Process

At atmospheric pressures and above. See Table 10

- (1) LCD Display may not be readable and updates may be slower at temperatures below -22 °F (-30 °C)

Table 10. 3051 Process Temperature Limits

3051CD, 3051CG, 3051CF, 3051CA	
Silicone Fill Sensor <sup>(1)</sup>	
with Coplanar Flange	-40 to 250 °F (-40 to 121 °C) <sup>(2)</sup>
with Traditional Flange	-40 to 300 °F (-40 to 149 °C) <sup>(2)(3)</sup>
with Level Flange	-40 to 300 °F (-40 to 149 °C) <sup>(2)</sup>
with 305 Integral Manifold	-40 to 300 °F (-40 to 149 °C) <sup>(2)</sup>
Inert Fill Sensor <sup>(1)</sup>	0 to 185 °F (-18 to 85 °C) <sup>(4)(5)</sup>
3051T (Process Fill Fluid)	
Silicone Fill Sensor <sup>(1)</sup>	-40 to 250 °F (-40 to 121 °C) <sup>(2)</sup>
Inert Fill Sensor <sup>(1)</sup>	-22 to 250 °F (-30 to 121 °C) <sup>(2)</sup>
3051L Low-Side Temperature Limits	
Silicone Fill Sensor <sup>(1)</sup>	-40 to 250 °F (-40 to 121 °C) <sup>(2)</sup>
Inert Fill Sensor <sup>(1)</sup>	0 to 185 °F (-18 to 85 °C) <sup>(2)</sup>
3051L High-Side Temperature Limits (Process Fill Fluid)	
Syltherm <sup>®</sup> XLT	-100 to 300 °F (-73 to 149 °C)
D.C. Silicone 704 <sup>®</sup>	32 to 400 °F (0 to 205 °C)
D.C. Silicone 200	-40 to 400 °F (-40 to 205 °C)
Inert	-50 to 350 °F (-45 to 177 °C)
Glycerin and Water	0 to 200 °F (-18 to 93 °C)
Neobee M-20	0 to 400 °F (-18 to 205 °C)
Propylene Glycol and Water	0 to 200 °F (-18 to 93 °C)

- (1) Process temperatures above 185 °F (85 °C) require derating the ambient limits by a 1.5:1 ratio.
- (2) 220 °F (104 °C) limit in vacuum service; 130 °F (54 °C) for pressures below 0.5 psia.
- (3) 3051CD0 process temperature limits are -40 to 212 °F (-45 to 100 °C)
- (4) 160 °F (71 °C) limit in vacuum service.
- (5) Not available for 3051CA.

## Humidity Limits

0–100% relative humidity

## Turn-On Time

Performance within specifications less than 2.0 seconds (10.0 s for Profibus protocol) after power is applied to the transmitter

## Volumetric Displacement

Less than 0.005 in<sup>3</sup> (0,08 cm<sup>3</sup>)

## Damping

### 4-20 mA HART

Analog output response to a step input change is user-selectable from 0 to 36 seconds for one time constant. This software damping is in addition to sensor module response time.

### FOUNDATION fieldbus

Transducer block: 0.4 seconds fixed

AI Block: User configurable

### Profibus PA

AI Block only: User configurable

# Rosemount 3051

## PHYSICAL SPECIFICATIONS

### Electrical Connections

$1/2$ -14 NPT, G $1/2$ , and M20 × 1.5 conduit. HART interface connections fixed to terminal block.

### Process Connections

#### Rosemount 3051C

$1/4$ -18 NPT on 2 $1/8$ -in. centers  
 $1/2$ -14 NPT on 2-, 2 $1/8$ -, or 2 $1/4$ -in. centers

#### Rosemount 3051L

High pressure side: 2-, 3-, or 4-in., ASME B 16.5 (ANSI) Class 150, 300 or 600 flange; 50, 80 or 100 mm, PN 40 or 10/16 flange  
Low pressure side:  $1/4$ -18 NPT on flange  $1/2$ -14 NPT on adapter

#### Rosemount 3051T

$1/2$ -14 NPT female. A DIN 16288 Male (available in SST for Range 1-4 transmitters only), or Autoclave type F-250-C (Pressure relieved  $9/16$ -18 gland thread;  $1/4$  OD high pressure tube 60° cone; available in SST for Range 5 transmitters only).

#### Rosemount 3051CF

For 3051CFA, see 00813-01000-4485 in the 485 section  
For 3051CFC, see 00813-01000-4485 in the 405 section  
For 3051CFP, see 00813-01000-4485 in the 1195 section

## Process-Wetted Parts

### Drain/Vent Valves

316 SST, Alloy C-276, or Alloy 400 material (Alloy 400 not available with 3051L)

### Process Flanges and Adapters

Plated carbon steel, SST cast CF-8M (cast version of 316 SST, material per ASTM-A743), C-Type cast alloy CW12MW, or cast alloy M30C

### Wetted O-rings

Glass-filled PTFE or Graphite-filled PTFE

## Process Isolating Diaphragms

Isolating Diaphragm Material	3051CD 3051CG	3051T	3051CA
316L SST	•	•	•
Alloy C-276	•	•	•
Alloy 400	•		•
Tantalum	•		
Gold-plated Alloy 400	•		•
Gold-plated SST	•		•

## Rosemount 3051L Process Wetted Parts

### Flanged Process Connection (Transmitter High Side)

#### Process Diaphragms, Including Process Gasket Surface

316L SST, Alloy C-276, or Tantalum

#### Extension

CF-3M (Cast version of 316L SST, material per ASTM-A743), or Alloy C-276. Fits schedule 40 and 80 pipe.

#### Mounting Flange

Zinc-cobalt plated CS or SST

### Reference Process Connection (Transmitter Low Side)

#### Isolating Diaphragms

316L SST or Alloy C-276

#### Reference Flange and Adapter

CF-8M (Cast version of 316 SST, material per ASTM-A743)

## Non-Wetted Parts

### Electronics Housing

Low-copper aluminum or CF-8M (Cast version of 316 SST). Enclosure Type 4X, IP 65, IP 66, IP 68

### Coplanar Sensor Module Housing

CF-3M (Cast version of 316L SST, material per ASTM-A743)

### Bolts

ASTM A449, Type 1 (zinc-cobalt plated carbon steel)  
ASTM F593G, Condition CW1 (Austenitic 316 SST)  
ASTM A193, Grade B7M (zinc plated alloy steel)  
Alloy K-500

### Sensor Module Fill Fluid

Silicone or inert halocarbon  
In-line series uses Fluorinert® FC-43

### Process Fill Fluid (3051L only)

Syltherm XLT, D.C. Silicone 704,  
D.C. Silicone 200, inert, glycerin and water, Neobee M-20 or propylene glycol and water

### Paint

Polyurethane

### Cover O-rings

Buna-N

## Product Data Sheet

00813-0100-4001, Rev LA

November 2010

# Rosemount 3051

## Shipping Weights

Table 11. Transmitter Weights without Options

Transmitter	Add Weight In lb. (kg)
3051C	6.0 (2,7)
3051T	3.0 (1,4)
3051L	Table 12 on page 43

Table 12. 3051L Weights without Options

Flange	Flush lb. (kg)	2-in. Ext. lb. (kg)	4-in. Ext. lb. (kg)	6-in. Ext. lb. (kg)
2-in., 150	12.5 (5,7)	—	—	—
3-in., 150	17.5 (7,9)	19.5 (8,8)	20.5 (9,3)	21.5 (9,7)
4-in., 150	23.5 (10,7)	26.5 (12,0)	28.5 (12,9)	30.5 (13,8)
2-in., 300	17.5 (7,9)	—	—	—
3-in., 300	22.5 (10,2)	24.5 (11,1)	25.5 (11,6)	26.5 (12,0)
4-in., 300	32.5 (14,7)	35.5 (16,1)	37.5 (17,0)	39.5 (17,9)
2-in., 600	15.3 (6,9)	—	—	—
3-in., 600	25.2 (11,4)	27.2 (12,3)	28.2 (12,8)	29.2 (13,2)
DN 50/PN 40	13.8 (6,2)	—	—	—
DN 80/PN 40	19.5 (8,8)	21.5 (9,7)	22.5 (10,2)	23.5 (10,6)
DN 100/ PN 10/16	17.8 (8,1)	19.8 (9,0)	20.8 (9,5)	21.8 (9,9)
DN 100/ PN 40	23.2 (10,5)	25.2 (11,5)	26.2 (11,9)	27.2 (12,3)

Table 13. Transmitter Options Weights

Code	Option	Add lb. (kg)
J, K, L, M	Stainless Steel Housing (T)	3.9 (1,8)
J, K, L, M	Stainless Steel Housing (C, L, H, P)	3.1 (1,4)
M4/M5	LCD display for Aluminum Housing	0.5 (0,2)
M4/M6	LCD display for SST Housing	1.25 (0,6)
B4	SST Mounting Bracket for Coplanar Flange	1.0 (0,5)
B1, B2, B3	Mounting Bracket for Traditional Flange	2.3 (1,0)
B7, B8, B9	Mounting Bracket for Traditional Flange	2.3 (1,0)
BA, BC	SST Bracket for Traditional Flange	2.3 (1,0)
H2	Traditional Flange	2.4 (1,1)
H3	Traditional Flange	2.7 (1,2)
H4	Traditional Flange	2.6 (1,2)
H7	Traditional Flange	2.5 (1,1)
FC	Level Flange—3 in., 150	10.8 (4,9)
FD	Level Flange—3 in., 300	14.3 (6,5)
FA	Level Flange—2 in., 150	10.7 (4,8)
FB	Level Flange—2 in., 300	14.0 (6,3)
FP	DIN Level Flange, SST, DN 50, PN 40	8.3 (3,8)
FQ	DIN Level Flange, SST, DN 80, PN 40	13.7 (6,2)

## Product Certifications

### Approved Manufacturing Locations

Rosemount Inc. — Chanhassen, Minnesota USA  
Emerson Process Management GmbH & Co. — Wessling, Germany  
Emerson Process Management Asia Pacific Private Limited — Singapore  
Beijing Rosemount Far East Instrument Co., LTD — Beijing, China  
Emerson Process Management LTDA — Sorocaba, Brazil  
Emerson Process Management (India) Pvt. Ltd. — Daman, India

### European Directive Information

The EC declaration of conformity for all applicable European directives for this product can be found on the Rosemount website at [www.rosemount.com](http://www.rosemount.com). A hard copy may be obtained by contacting an Emerson Process Management representative.

#### *ATEX Directive (94/9/EC)*

All 3051 transmitters comply with the ATEX Directive.

#### *European Pressure Equipment Directive (PED) (97/23/EC)*

3051CA4; 3051CG2, 3, 4, 5; 3051CD2, 3, 4, 5

(also with P9 option)

— QS Certificate of Assessment - EC No. 59552-2009-CE-HOU-DNV  
Module H Conformity Assessment

#### *All other 3051 Pressure Transmitters*

— Sound Engineering Practice

#### *Transmitter Attachments: Diaphragm Seal - Process Flange - Manifold*

— Sound Engineering Practice

#### *Electro Magnetic Compatibility (EMC) (2004/108/EC)*

All 3051 Pressure Transmitters meet all of the requirements of EN61326 and NAMUR NE-21

#### *Ordinary Location Certification for Factory Mutual*

As standard, the transmitter has been examined and tested to determine that the design meets basic electrical, mechanical, and fire protection requirements by FM, a nationally recognized testing laboratory (NRTL) as accredited by the Federal Occupational Safety and Health Administration (OSHA).

### HART PROTOCOL

### Hazardous Locations Certifications

#### North American Certifications

##### *FM Approvals*

- E5** Explosion-Proof for Class I, Division 1, Groups B, C, and D. Dust-Ignition-Proof for Class II, Division 1, Groups E, F, and G. Dust-Ignition-Proof for Class III, Division 1. Factory Sealed, Enclosure Type 4X
- I5** Intrinsically Safe for use in Class I, Division 1, Groups A, B, C, and D; Class II, Division 1, Groups E, F, and G; Class III, Division 1 when connected per Rosemount drawing 03031-1019; Non-incendive for Class I, Division 2, Groups A, B, C, and D. Temperature Code:T4 (Ta = 40 °C), T3 (Ta = 85 °C), Enclosure Type 4X  
For input parameters see control drawing 03031-1019.

##### *Canadian Standards Association (CSA)*

All CSA hazardous approved transmitters are certified per ANSI/ISA 12.27.01-2003.

- E6** Explosion-Proof for Class I, Division 1, Groups B, C, and D. Dust-Ignition-Proof for Class II and Class III, Division 1, Groups E, F, and G. Suitable for Class I, Division 2 Groups A, B, C, and D for indoor and outdoor hazardous locations. Enclosure type 4X, factory sealed
- C6** Explosion-Proof and intrinsically safe approval. Intrinsically safe for Class I, Division 1, Groups A, B, C, and D when connected in accordance with Rosemount drawings 03031-1024. Temperature Code T3C. Explosion-Proof for Class I, Division 1, Groups B, C, and D. Dust-Ignition-Proof for Class II and Class III, Division 1, Groups E, F, and G. Suitable for Class I, Division 2 Groups A, B, C, and D hazardous locations. Enclosure type 4X, factory sealed  
For input parameters see control drawing 03031-1024.

# Product Data Sheet

00813-0100-4001, Rev LA

November 2010

# Rosemount 3051

## European Certifications


- I1** ATEX Intrinsic Safety and Dust  
Certification No.: BAS 97ATEX1089X  II 1 GD  
Ex ia IIC T4 ( $-60 \leq T_a \leq +70 \text{ }^\circ\text{C}$ )  
Dust Rating: Ex tD A20 T80  $^\circ\text{C}$  ( $-20 \leq T_a \leq 40 \text{ }^\circ\text{C}$ ) IP66  
**CE** 1180

TABLE 14. Input Parameters

$U_i = 30\text{V}$
$I_i = 200\text{ mA}$
$P_i = 0.9\text{W}$
$C_i = 0.012\text{ }\mu\text{F}$


TABLE 15. RTD Assembly (3051CFx Option T or R)

$U_i = 5\text{ Vdc}$
$I_i = 500\text{ mA}$
$P_i = 0.63\text{W}$

### Special Conditions for Safe Use (X):


When the optional transient protection terminal block is installed, the apparatus is not capable of withstanding the 500V insulation test required by Clause 6.3.12 of EN60079-11. This must be taken into account when installing the apparatus.

The enclosure may be made of aluminium alloy and given a protective polyurethane paint finish; however care should be taken to protect it from impact or abrasion located in Zone 0.

- N1** ATEX Type n and Dust  
Certification No.: BAS 00ATEX3105X  II 3 GD  
 $U_i = 55\text{ Vdc max}$   
Ex nA nL T5 ( $-40^\circ\text{C} \leq T_{amb} \leq 70^\circ\text{C}$ )  
Dust rating: Ex tD A22 T80  $^\circ\text{C}$  ( $-20 \leq T_a \leq 40 \text{ }^\circ\text{C}$ ) IP66  
**CE**

### Special Conditions for Safe Use (X):

When the optional transient protection terminal block is installed, the apparatus is not capable of withstanding a 500V r.m.s. test to case. This must be taken into account on any installation in which it is used, for example by assuring that the supply to the apparatus is galvanically isolated.

- E8** ATEX Flame-Proof and Dust  
Certification No.: KEMA 00ATEX2013X  II 1/2 GD  
Ex d IIC T6 ( $-50 \leq T_a \leq 65 \text{ }^\circ\text{C}$ )  
Dust rating: Ex tD A20/A21 T90  $^\circ\text{C}$ , IP66  
**CE** 1180  
 $V_{max} = 55\text{ V dc}$

### Special Conditions for Safe Use (X):

This device contains a thin wall diaphragm. Installation, maintenance, and use shall take into account the environmental conditions to which the diaphragm will be subjected. The manufacturer's instructions for installation and maintenance shall be followed in detail to assure safety during its expected lifetime.

In case of repair, contact the manufacturer for information on the dimensions of the flameproof joints.

## IECEX Certifications

- I7** IECEx Intrinsic Safety  
Certification No.: IECEx BAS 09.0076X  
Ex ia IIC T4 ( $-60 \text{ }^\circ\text{C} \leq T_a \leq 70 \text{ }^\circ\text{C}$ )  
IP66

TABLE 16. Input Parameters

$U_i = 30\text{V}$
$I_i = 200\text{ mA}$
$P_i = 0.9\text{W}$
$C_i = 0.012\text{ }\mu\text{F}$

TABLE 17. RTD Assembly (3051CFx Option T or R)

$U_i = 5\text{ Vdc}$
$I_i = 500\text{ mA}$
$P_i = 0.63\text{W}$

### Special Conditions for Safe Use (X):

When the optional transient protection terminal block is installed, the apparatus is not capable of withstanding the 500V insulation test required by Clause 6.3.12 of IEC 60079-11. This must be taken into account when installing the apparatus.

The enclosure may be made of aluminium alloy and given a protective polyurethane paint finish; however care should be taken to protect it from impact or abrasion located in Zone 0.

- E7** IECEx Explosion-Proof (Flame-Proof)  
Certification No.: IECEx KEM 09.0034X  
Ga/Gb Ex d IIC T6 or T5  
Ex tD A20/A21 IP66 T90  $^\circ\text{C}$   
IP66

### Special Conditions for Safe Use (X):

This device contains a thin wall diaphragm. Installation, maintenance and use shall take into account the environmental conditions to which the diaphragm will be subjected. The manufacturer's instructions for installation and maintenance shall be followed in detail to assure safety during its expected lifetime.

For information on the dimensions of the flameproof joints the manufacturer shall be contacted.

- N7** IECEx Type n  
Certification No.: IECEx BAS 09.0077X  
Ex nA nL IIC T5 ( $-40 \text{ }^\circ\text{C} \leq T_a \leq 70 \text{ }^\circ\text{C}$ )  
IP66

### Special Conditions for Safe Use (X):

The apparatus is not capable of withstanding the 500V insulation test required by clause 6.8.1 of IEC 60079-15. This must be taken into account when installing the apparatus.

# Rosemount 3051

## TIIS Certifications

**E4** TIIS Flame-Proof  
 Ex d IIC T6

Certificate	Description
TC15850	3051C/D/1 4–20 mA HART — no display
TC15851	3051C/D/1 4–20 mA HART — with display
TC15854	3051T/G/1 4–20 mA HART, SST, Silicon — no display
TC15855	3051T/G/1 4–20 mA HART, Alloy C-276, Silicon — no display
TC15856	3051T/G/1 4–20 mA HART, SST, Silicon — with display
TC15857	3051T/G/1 4–20 mA HART, Alloy C-276, Silicon — with display

**I4** TIIS Intrinsic Safety  
 Ex ia IIC T4

Certificate	Description
TC16406	3051CD/CG

## Combinations of Certifications

Stainless steel certification tag is provided when optional approval is specified. Once a device labeled with multiple approval types is installed, it should not be reinstalled using any other approval types. Permanently mark the approval label to distinguish it from unused approval types.

- K5** E5 and I5 combination
- KB** K5 and C6 combination
- KD** K5, C6, I1, and E8 combination
- K6** C6, I1, and E8 combination
- K8** E8 and I1 combination
- K7** E7, I7, and N7 combination

**FOUNDATION FIELDBUS AND PROFIBUS PA PROTOCOLS**

**Hazardous Locations Certifications**

**North American Certifications**

*FM Approvals*

- E5** Explosion-Proof for Class I, Division 1, Groups B, C, and D. Dust-Ignition-Proof for Class II, Division 1, Groups E, F, and G. Dust-Ignition-Proof for Class III, Division 1.
- I5** Intrinsically Safe for use in Class I, Division 1, Groups A, B, C, and D; Class II, Division 1, Groups E, F, and G; Class III, Division 1 when connected per Rosemount drawing 03031-1019; Non-incendive for Class I, Division 2, Groups A, B, C, and D.  
  
Temperature Code:T4 (Ta = 60 °C), T3 (Ta = 85 °C), Enclosure Type 4X  
For input parameters see control drawing 03031-1019.

*Canadian Standards Association (CSA)*

All CSA hazardous approved transmitters are certified per ANSI/ISA 12.27.01-2003.

- E6** Explosion-Proof for Class I, Division 1, Groups B, C, and D. Dust-Ignition-Proof for Class II and Class III, Division 1, Groups E, F, and G. Suitable for Class I, Division 2 Groups A, B, C, and D for indoor and outdoor hazardous locations. Enclosure type 4X, factory sealed
- C6** Explosion-Proof and intrinsically safe approval. Intrinsically safe for Class I, Division 1, Groups A, B, C, and D when connected in accordance with Rosemount drawings 03031-1024. Temperature Code T3C.  
Explosion-Proof for Class I, Division 1, Groups B, C, and D. Dust-Ignition-Proof for Class II and Class III, Division 1, Groups E, F, and G. Suitable for Class I, Division 2 Groups A, B, C, and D hazardous locations. Enclosure type 4X, factory sealed  
For input parameters see control drawing 03031-1024.

**European Certifications**

- I1** ATEX Intrinsic Safety and Dust  
Certification No.: BAS 98ATEX1355X Ⓢ II 1 GD  
Ex ia IIC T4 (T<sub>amb</sub> = -60 to +60 °C)  
Ex td A20 IP66 T 70 °C (-20 ≤ T<sub>a</sub> ≤ 40 °C)  
CE 1180

TABLE 18. Input Parameters

U <sub>i</sub> = 30V
I <sub>i</sub> = 300 mA
P <sub>i</sub> = 1.3 W
C <sub>i</sub> = 0 μF

TABLE 19. RTD Assembly (3051CFx Option T or R)

U <sub>i</sub> = 5 Vdc
I <sub>i</sub> = 500 mA
P <sub>i</sub> = 0.63W

**Special Conditions for Safe Use (X):**

1. If the apparatus is fitted with an optional 90V transient suppressor, it is not capable of withstanding the 500V insulation test required by clause 6.3.12 of EN 60079-11. This must be taken into account when installing the apparatus.
2. The enclosure may be made of aluminium alloy and given a protective polyurethane paint finish; however, care should be taken to protect it from impact or abrasion if located in Zone 0.

- IA** ATEX FISCO Intrinsic Safety  
Certification No.: BAS 98ATEX1355X Ⓢ II 1 G  
Ex ia IIC T4 (T<sub>amb</sub> = -60 to +60 °C)  
IP66  
CE 1180

TABLE 20. Input Parameters

U <sub>i</sub> = 17.5 V
I <sub>i</sub> = 380 mA
P <sub>i</sub> = 5.32 W
C <sub>i</sub> = ≤ 5 μF
L <sub>i</sub> = ≤ 10 μH

**Special Conditions for Safe Use (X):**

When the optional transient protection terminal block is installed, the apparatus is not capable of withstanding the 500V insulation test required by Clause 6.3.12 of EN60079-11. This must be taken into account when installing the apparatus.  
The enclosure may be made of aluminium alloy and given a protective polyurethane paint finish; however care should be taken to protect it from impact or abrasion located in Zone 0.

- N1** ATEX Type n and Dust  
Certification No.: BAS 98ATEX3356X Ⓢ II 3 GD  
U<sub>i</sub> = 40 Vdc max  
Ex nL IIC T5 (T<sub>a</sub> = -40°C to 70 °C)  
Dust rating: Ex tD A22 T80 °C (T<sub>amb</sub> = -20 to 40 °C) IP66

**Special Conditions for Safe Use (X):**

The apparatus is not capable of withstanding the 500V insulation test required by clause 6.8.1 of EN 60079-15. This must be taken into account when installing the apparatus.

- E8** ATEX Flame-Proof and Dust  
Certification No.: KEMA 00ATEX2013X Ⓢ II 1/2 GD  
Ex d IIC T6 (T<sub>amb</sub> = -50 to 65 °C)  
Dust rating: Ex tD A20/21 T90 °C, IP66  
CE 1180  
V<sub>max</sub> = 55 V dc

**Special Conditions for Safe Use (X):**

This device contains a thin wall diaphragm. Installation, maintenance, and use shall take into account the environmental conditions to which the diaphragm will be subjected. The manufacturer's instructions for installation and maintenance shall be followed in detail to assure safety during its expected lifetime.  
In case of repair, contact the manufacturer for information on the dimensions of the flameproof joints.

### IECEX Certifications

- I7** IECEX Intrinsic Safety  
 Certification No.: IECEX BAS 09.0076X  
 Ex ia IIC T4 ( $-60\text{ °C} \leq T_a \leq 60\text{ °C}$ )  
 IP66

TABLE 21. Input Parameters

$U_i = 30\text{ V}$
$I_i = 300\text{ mA}$
$P_i = 1.3\text{ W}$
$C_i = 0\text{ }\mu\text{F}$
$L_i = 0\text{ }\mu\text{H}$

TABLE 22. RTD Assembly (3051CFx Option T or R)

$U_i = 5\text{ Vdc}$
$I_i = 500\text{ mA}$
$P_i = 0.63\text{ W}$

#### Special Conditions for Safe Use (X):

1. If the apparatus is fitted with an optional 90V transient suppressor, it is not capable of withstanding the 500V insulation test required by clause 6.3.12 of IEC 60079-11. This must be taken into account when installing the apparatus.
2. The enclosure may be made of aluminium alloy and given a protective polyurethane paint finish; however, care should be taken to protect it from impact or abrasion if located in Zone 0.

- E7** IECEX Explosion-Proof (Flame-Proof)  
 Certification No.: IECEX KEM 09.0034X  
 Ga/Gb Ex d IIC T6 or T5  
 Ex tD A20/A21 IP66 T90 °C  
 IP66

#### Special Conditions for Safe Use (X):

This device contains a thin wall diaphragm. Installation, maintenance and use shall take into account the environmental conditions to which the diaphragm will be subjected. The manufacturer's instructions for installation and maintenance shall be followed in detail to assure safety during its expected lifetime.

For information on the dimensions of the flameproof joints the manufacturer shall be contacted.

- N7** IECEX Type n  
 Certification No.: IECEX BAS 09.0077X  
 Ex nA nL IIC T5 ( $-40\text{ °C} \leq T_a \leq 70\text{ °C}$ )  
 IP66

#### Special Conditions for Safe Use (X):

The apparatus is not capable of withstanding the 500V insulation test required by clause 6.8.1 of IEC 60079-15. This must be taken into account when installing the apparatus.

### TIIS Certifications

- E4** TIIS Flame-Proof  
 Ex d IIC T6

Certificate	Description
TC15852	3051C/D/1 FOUNDATION Fieldbus — no display
TC15853	3051C/D/1 FOUNDATION Fieldbus — with display
TC15858	3051T/G/1 FOUNDATION Fieldbus, SST, Silicon — no display
TC15859	3051T/G/1 FOUNDATION Fieldbus, Alloy C-276, Silicon — no display
TC15860	3051T/G/1 FOUNDATION Fieldbus, SST, Silicon — with display
TC15861	3051T/G/1 FOUNDATION Fieldbus, Alloy C-276, Silicon — with display


### Combinations of Certifications


Stainless steel certification tag is provided when optional approval is specified. Once a device labeled with multiple approval types is installed, it should not be reinstalled using any other approval types. Permanently mark the approval label to distinguish it from unused approval types.

- K5** E5 and I5 combination  
**KB** K5 and C6 combination  
**KD** K5, C6, I1, and E8 combination  
**K6** C6, I1, and E8 combination  
**K8** E8 and I1 combination  
**K7** E7, I7, and N7 combination




## Dimensional Drawings

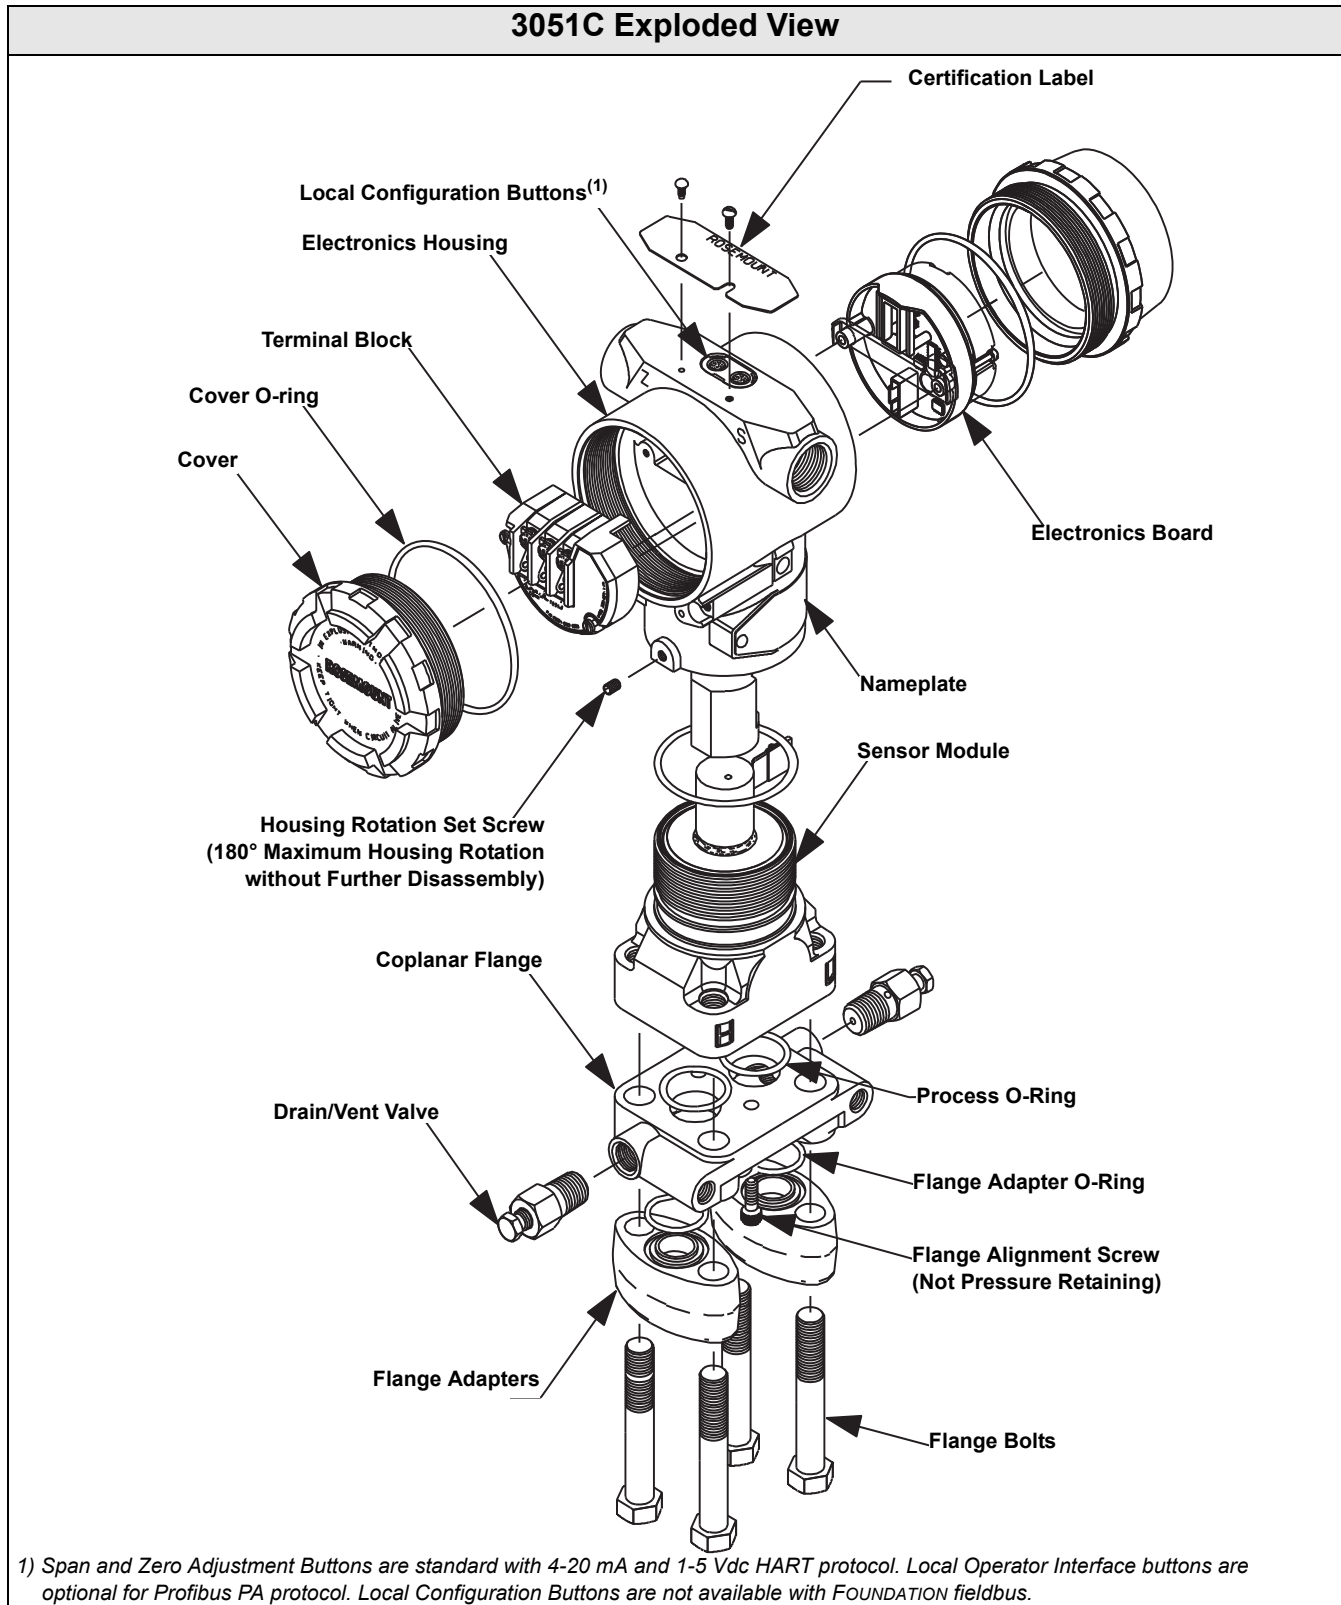

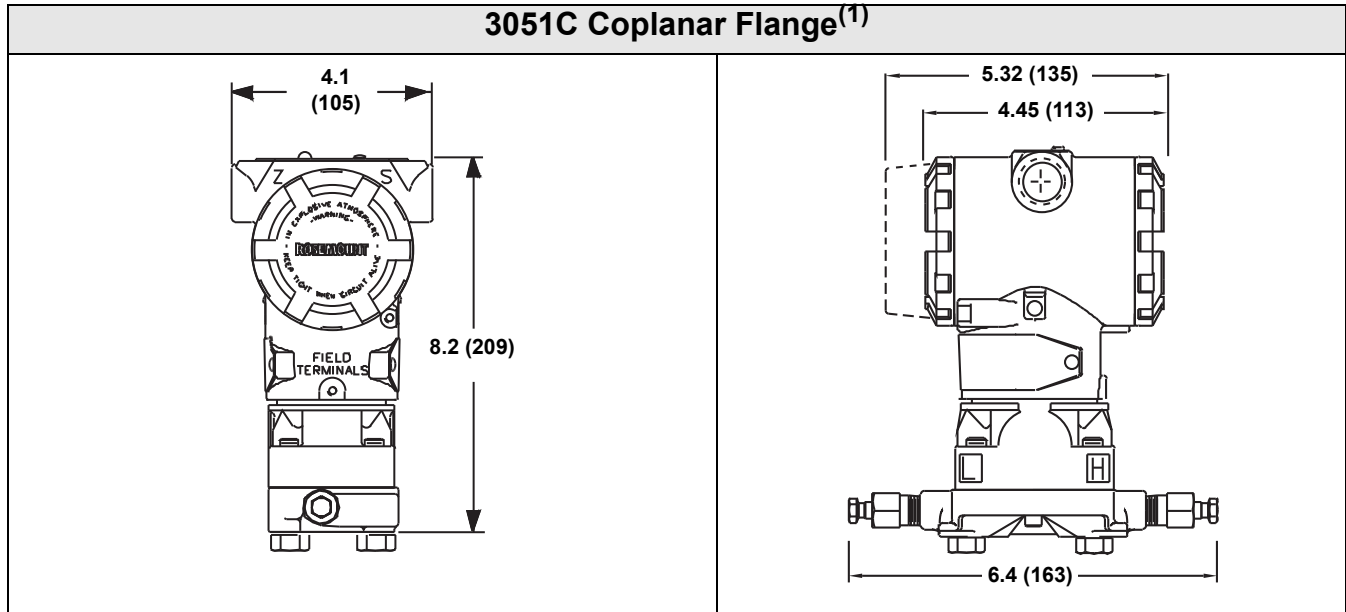

(1) For FOUNDATION fieldbus and Profibus PA transmitters with LCD Display, housing length is 5.78 in. (147 mm).

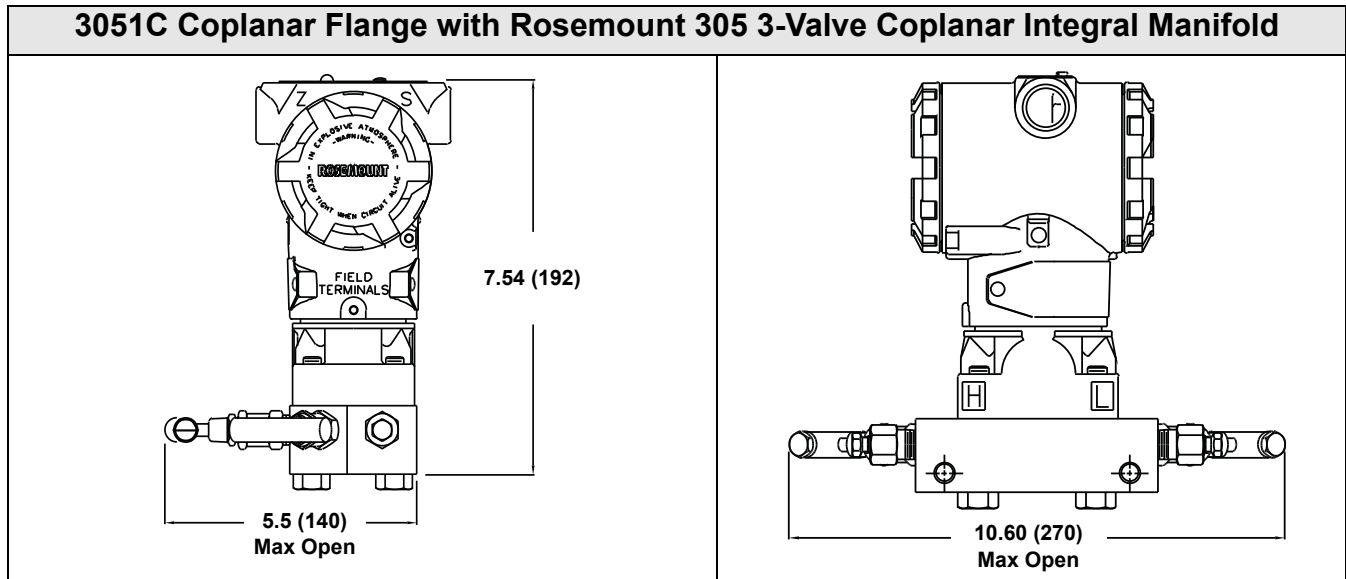


*Dimensions are in inches (millimeters)*

<b>Coplanar Flange Mounting Configurations with                      Optional Bracket (B4) for 2-in. Pipe or Panel Mounting</b>		
<b>PANEL MOUNTING</b>		
<b>PIPE MOUNTING</b>		


*Dimensions are in inches (millimeters)*

# Rosemount 3051

## 3051C Coplanar with Traditional Flange

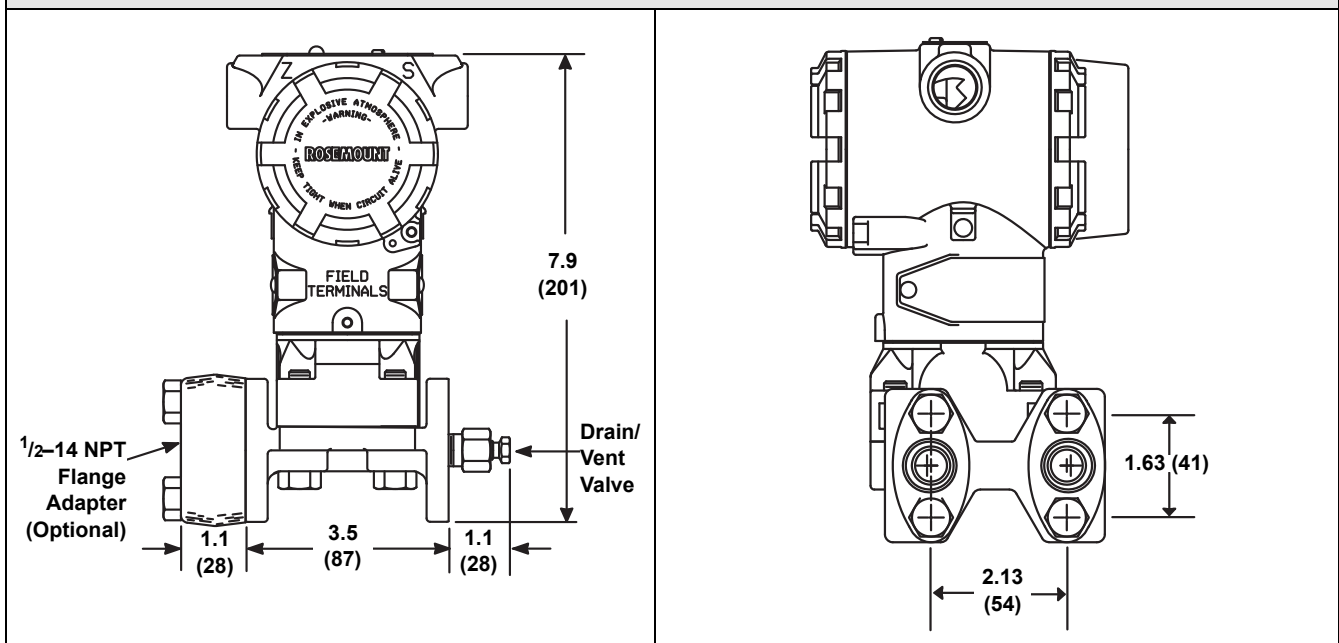


## 3051C Coplanar with Rosemount 305 3-Valve Traditional Integral Manifold

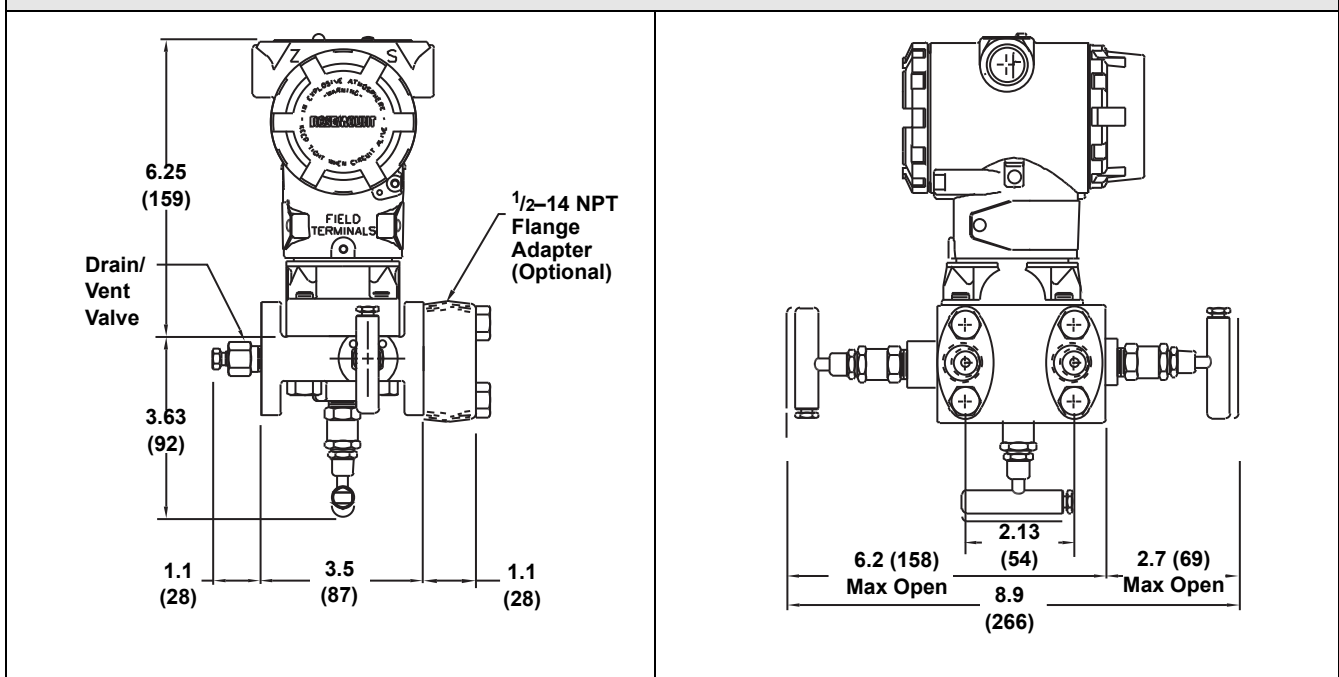


Dimensions are in inches (millimeters)

<b>Traditional Flange Mounting Configurations with Optional Brackets for 2-in. Pipe or Panel Mounting</b>	
<b>Panel Mounting Bracket (option B2/B8)</b>	<b>2-in. Pipe Mounting Bracket (option B1/B7/BA)</b>
<p>5/16 x 7/8 Bolts for Panel Mounting (Not Supplied)</p> <p>PANEL MOUNTING BRACKET</p> <p>Dimensions: 9.2 (235), 2.7 (67), 6.2 (158), 2.81 (71)</p>	<p>Impulse Piping</p> <p>PIPE MOUNTING BRACKET</p> <p>Dimensions: 4.2 (106), 1.1 (28), 3.8 (95), 9.6 (243), 2.7 (67), 1.4 (33), 4.6 (116)</p>
<b>2-in. Pipe Mounting Bracket (option B3/B9/BC)</b>	
<p>Dimensions: 4.85 (123), 11.52 (293), 1.94 (49), 5.32 (135), 6.2 (158)</p>	


*Dimensions are in inches (millimeters)*

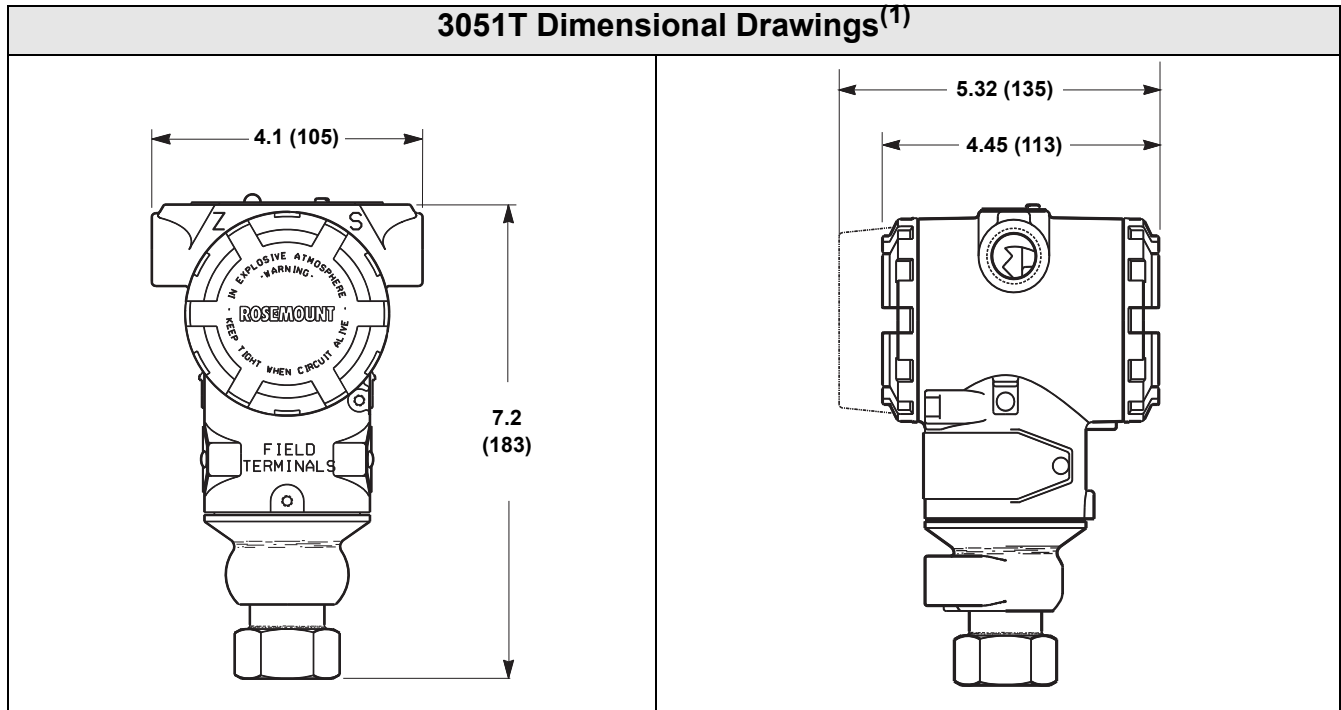


(1) For FOUNDATION fieldbus and Profibus PA transmitters with LCD Display, housing length is 5.78 in. (146 mm).

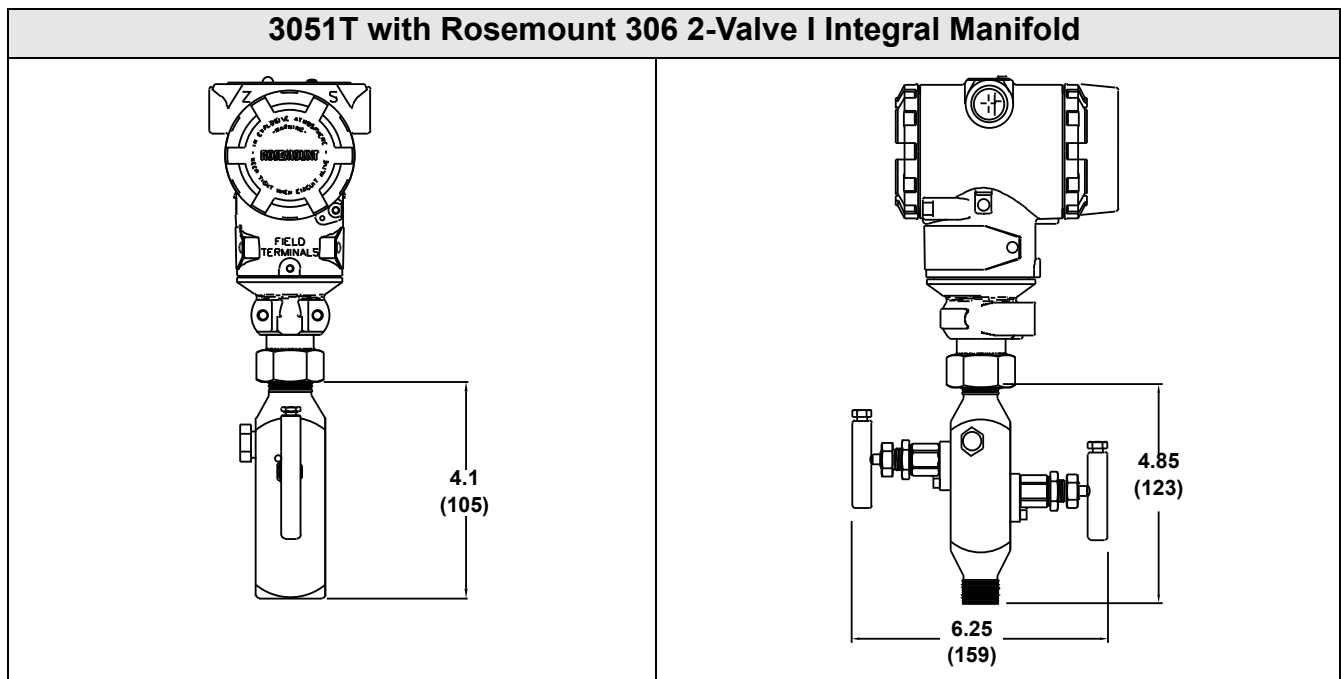

Dimensions are in inches (millimeters)

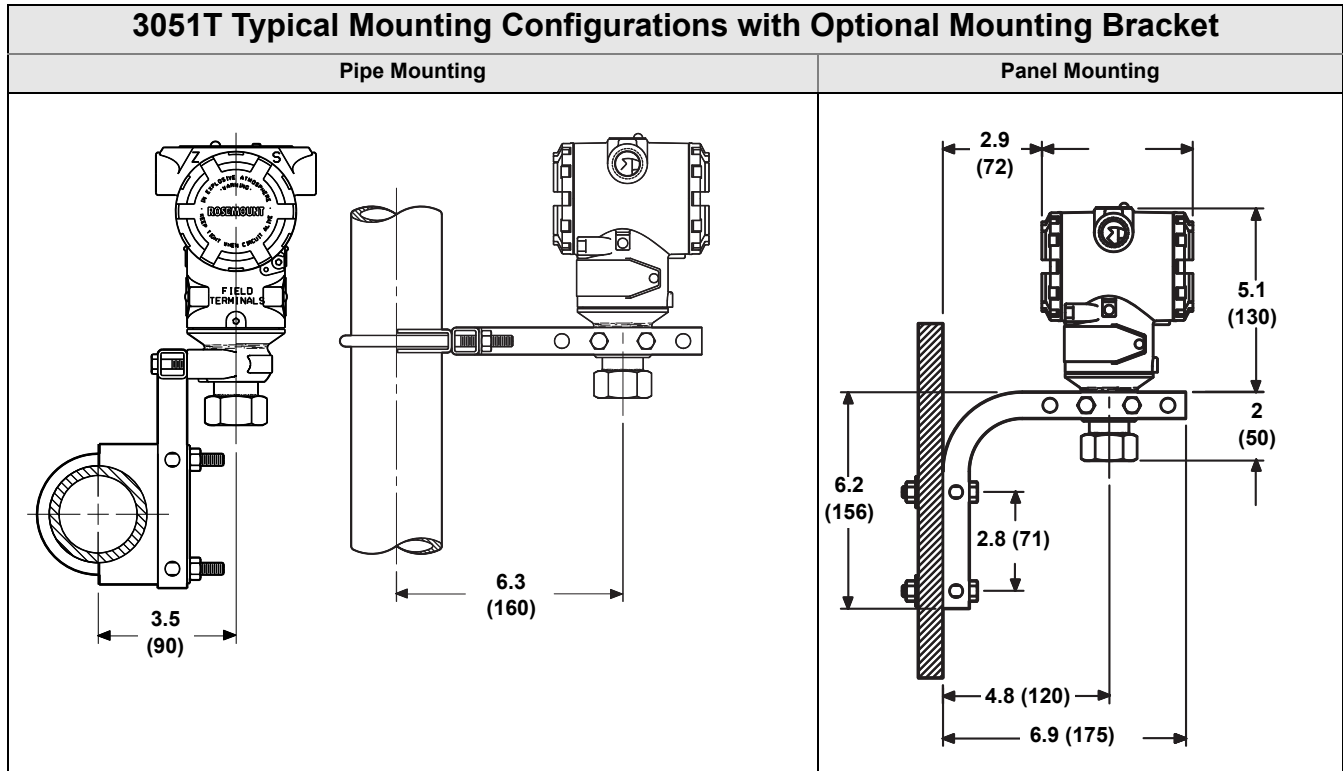

*Dimensions are in inches (millimeters)*

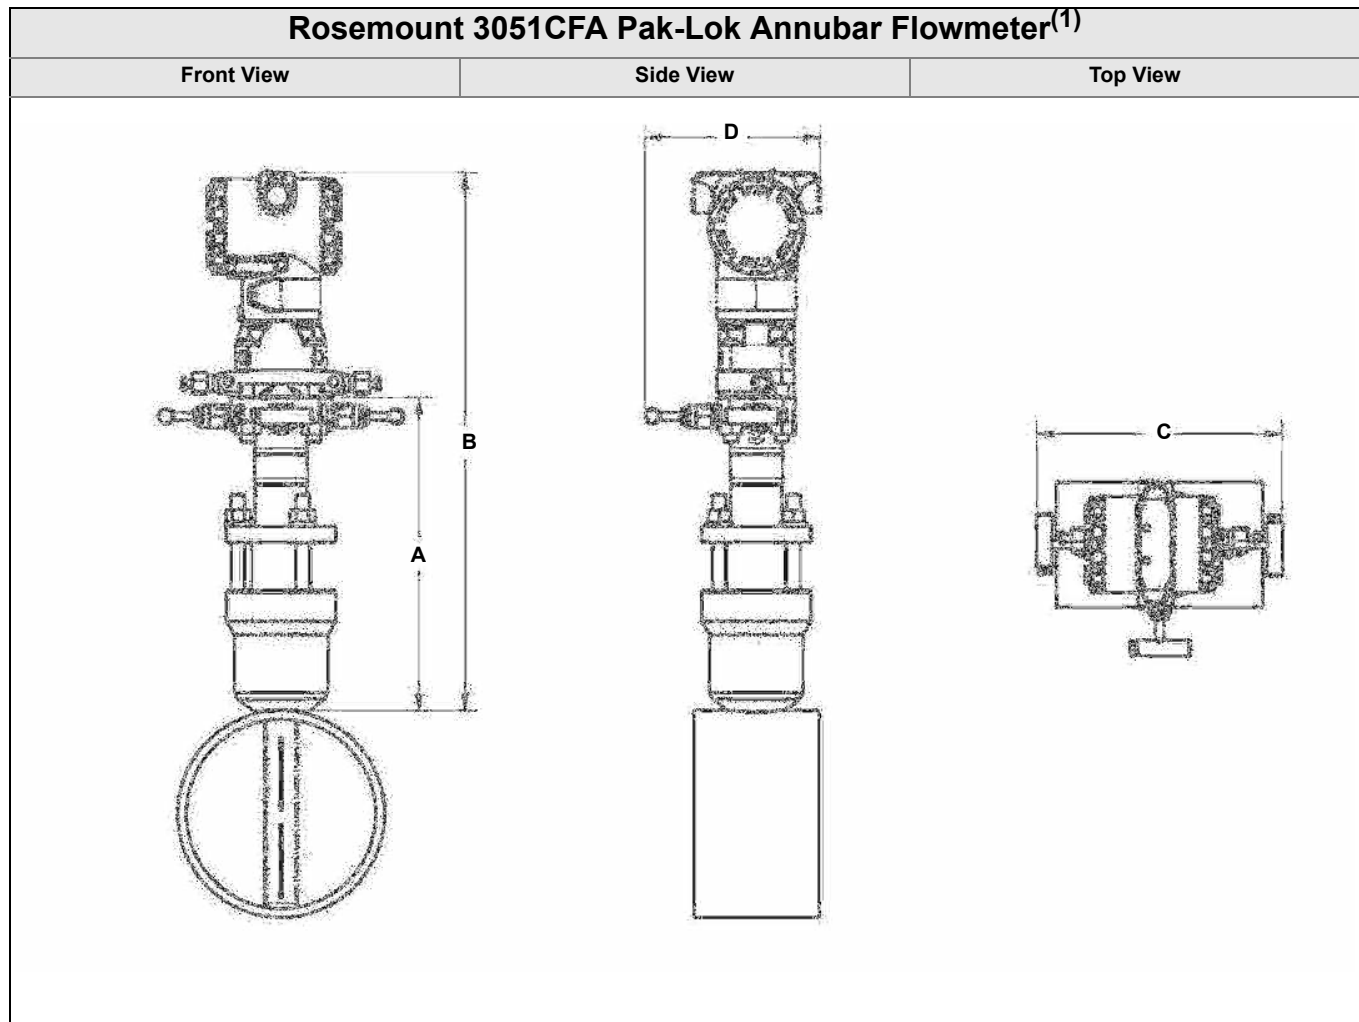

(1) The Pak-Lok Annubar model is available up to 600# ANSI (1440 psig at 100 °F (99 bar at 38 °C)).

Table 23. 3051CFA Pak-Lok Annubar Flowmeter Dimensional Data

Sensor Size	A (Max)	B (Max)	C (Max)	D (Max)
1	8.50 (215.9)	14.60 (370.8)	9.00 (228.6)	6.00 (152.4)
2	11.0 (279.4)	16.35 (415.3)	9.00 (228.6)	6.00 (152.4)
3	12.00 (304.8)	19.10 (485.1)	9.00 (228.6)	6.00 (152.4)
<i>Dimensions are in inches (millimeters)</i>				



<b>Rosemount 3051CFC Compact Orifice Flowmeter</b>			
	<b>Orifice Plate Side View</b>	<b>Orifice Plate Front View</b>	<b>Orifice Plate Top View</b>
<b>Compact Orifice Plate</b> (Primary Element Type code P)			
<b>Conditioning Orifice Plate</b> (Primary Element Type code C)			


Table 24. Dimensional Drawings

<b>Primary Element Type</b>	<b>A</b>	<b>B</b>	<b>Transmitter Height</b>	<b>C</b>	<b>D</b>
Type P and C	5.62 (143)	Transmitter Height + A	6.27 (159)	7.75 (197) - closed 8.25 (210) - open	6.00 (152) - closed 6.25 (159) - open

*Dimensions are in inches (millimeters)*


### Rosemount 3051CFP Integral Orifice Flowmeter

Side View

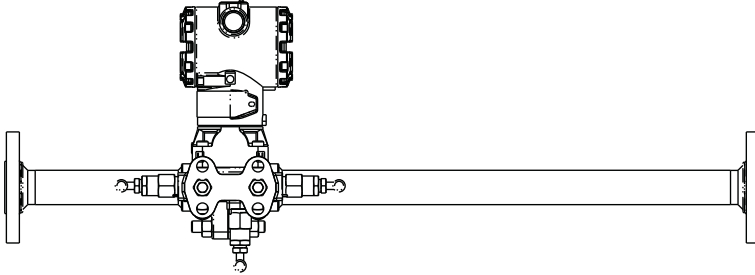

Bottom View

Front View

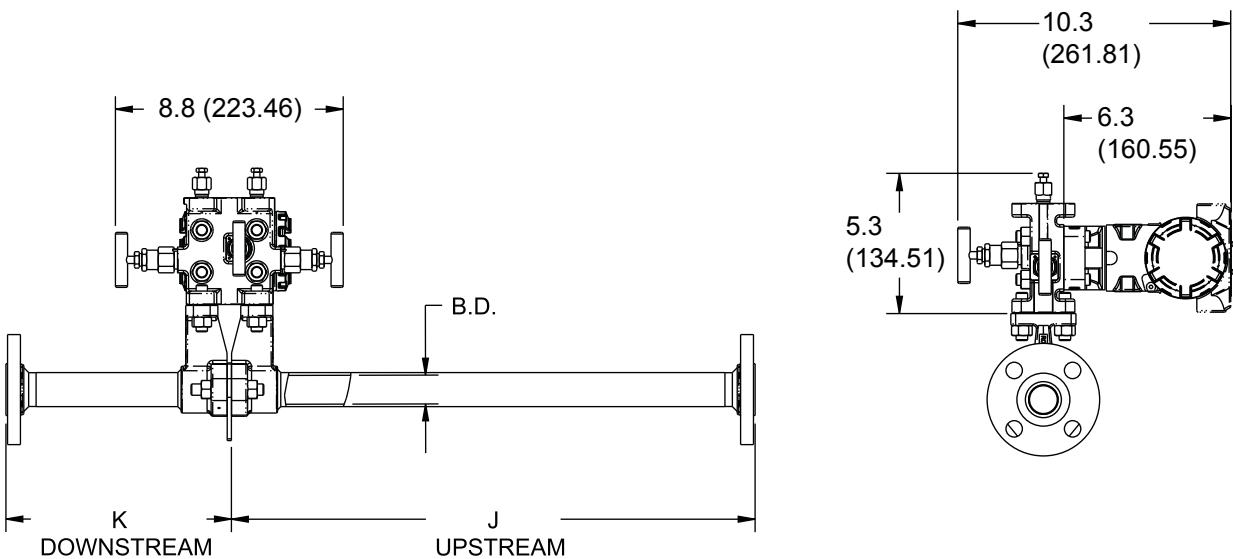


Dimensions are in inches (millimeters).

Dimension	Line Size		
	1/2-in. (15 mm)	1-in. (25 mm)	1 1/2-in. (40 mm)
J (Beveled/Threaded pipe ends)	12.54 (318.4)	20.24 (514.0)	28.44 (722.4)
J (RF slip-on, RTJ slip-on, RF-DIN slip on)	12.62 (320.4)	20.32 (516.0)	28.52 (724.4)
J (RF 150#, weld neck)	14.37 (364.9)	22.37 (568.1)	30.82 (782.9)
J (RF 300#, weld neck)	14.56 (369.8)	22.63 (574.7)	31.06 (789.0)
J (RF 600#, weld neck)	14.81 (376.0)	22.88 (581.0)	31.38 (797.1)
K (Beveled/Threaded pipe ends)	5.74 (145.7)	8.75 (222.2)	11.91 (302.6)
K (RF slip-on, RTJ slip-on, RF-DIN slip on) <sup>(1)</sup>	5.82 (147.8)	8.83 (224.2)	11.99 (304.6)
K (RF 150#, weld neck)	7.57 (192.3)	10.88 (276.3)	14.29 (363.1)
K (RF 300#, weld neck)	7.76 (197.1)	11.14 (282.9)	14.53 (369.2)
K (RF 600#, weld neck)	8.01 (203.4)	11.39 (289.2)	14.85 (377.2)
B.D. (Bore Diameter)	0.664 (16.87)	1.097 (27.86)	1.567 (39.80)

Dimensions are in inches (millimeters).

(1) Downstream length shown here includes plate thickness of 0.162-in. (4.11 mm).

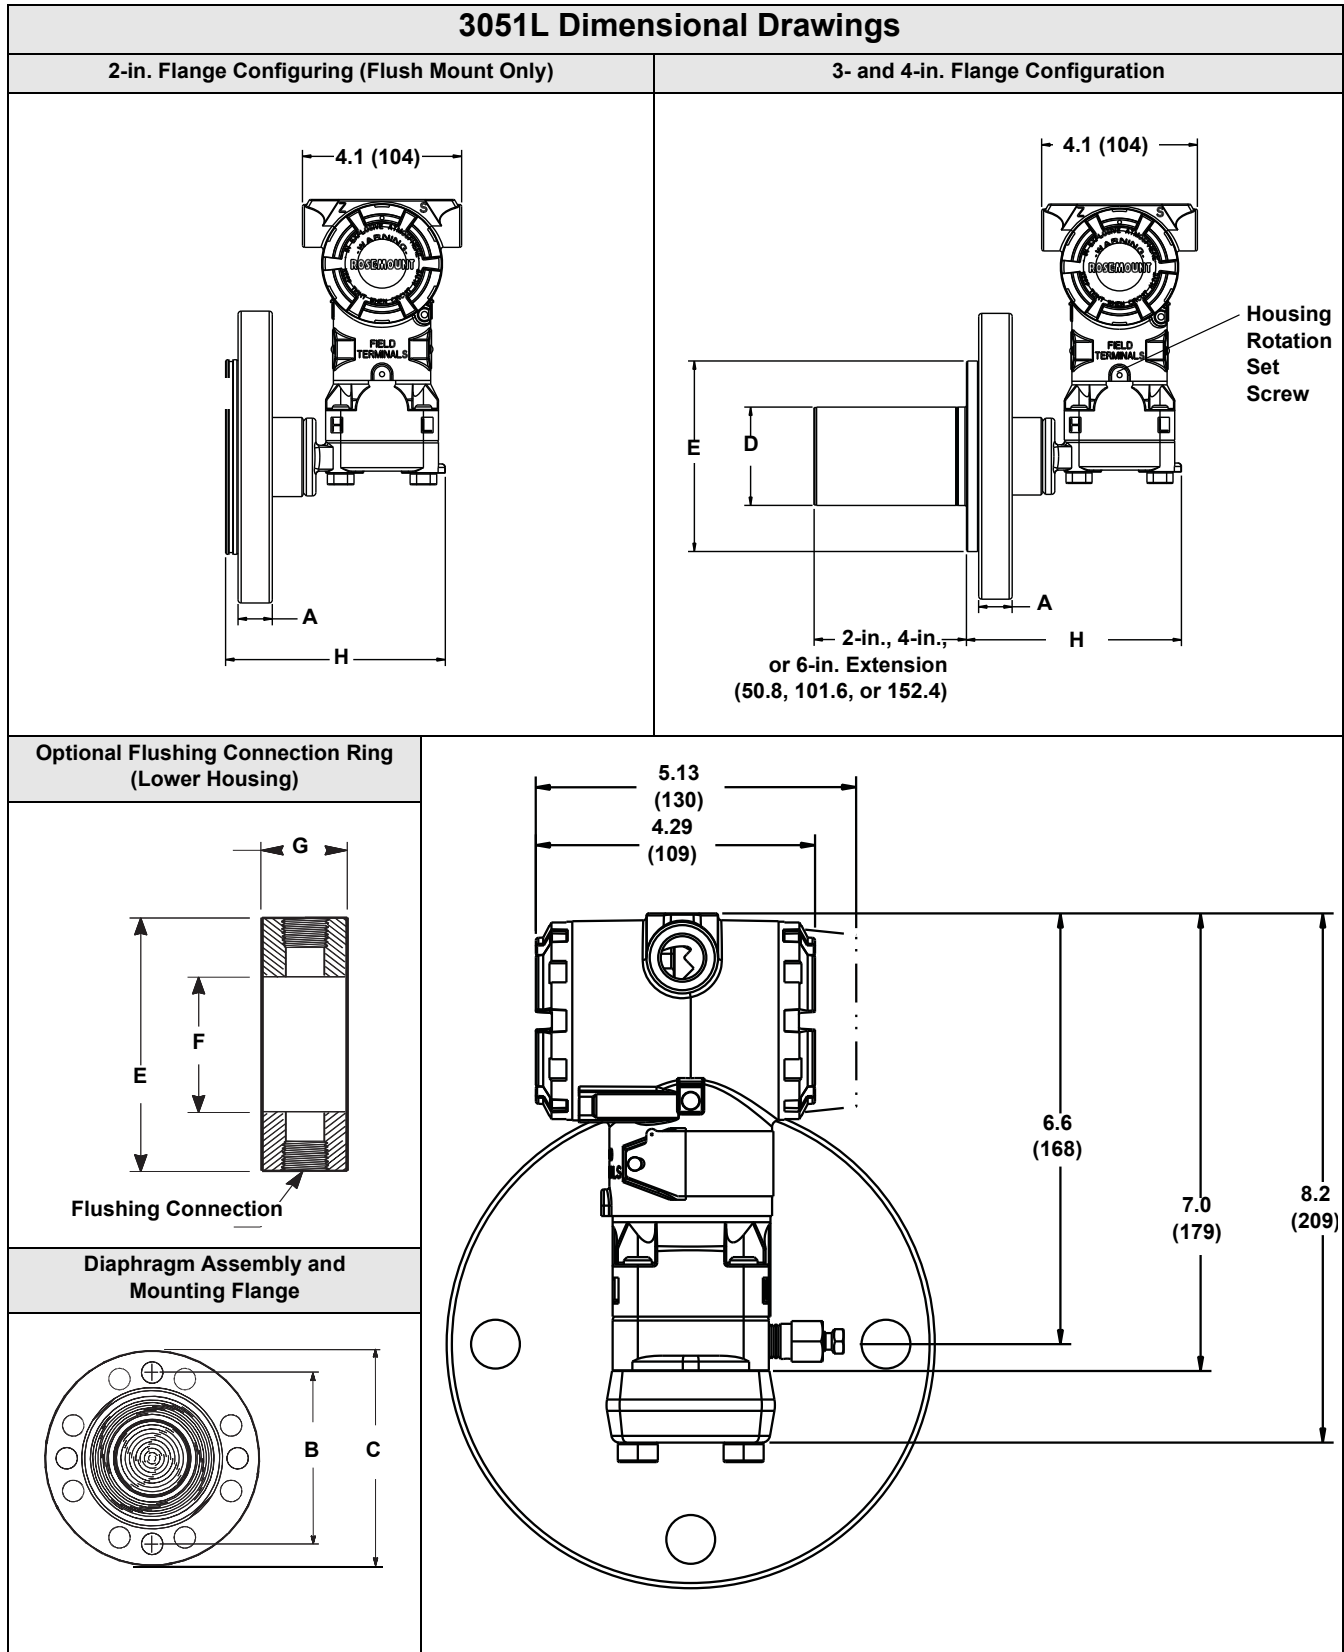

*Dimensions are in inches (millimeters)*

# Rosemount 3051

## Product Data Sheet

00813-0100-4001, Rev LA

November 2010

Table 25. 3051L Dimensional Specifications

Class <sup>(1)</sup>	Pipe Size	Flange Thickness A	Bolt Circle Diameter B	Outside Diameter C	No. of Bolts	Bolt Hole Diameter	Extension Diameter <sup>(1)</sup> D	O.D. Gasket Surface E
ASME B16.5 (ANSI) 150	2 (51)	0.69 (18)	4.75 (121)	6.0 (152)	4	0.75 (19)	NA	3.6 (92)
	3 (76)	0.88 (22)	6.0 (152)	7.5 (191)	4	0.75 (19)	2.58 (66)	5.0 (127)
	4 (102)	0.88 (22)	7.5 (191)	9.0 (229)	8	0.75 (19)	3.5 (89)	6.2 (158)
ASME B16.5 (ANSI) 300	2 (51)	0.82 (21)	5.0 (127)	6.5 (165)	8	0.75 (19)	NA	3.6 (92)
	3 (76)	1.06 (27)	6.62 (168)	8.25 (210)	8	0.88 (22)	2.58 (66)	5.0 (127)
	4 (102)	1.19 (30)	7.88 (200)	10.0 (254)	8	0.88 (22)	3.5 (89)	6.2 (158)
ASME B16.5 (ANSI) 600	2 (51)	1.00 (25)	5.0 (127)	6.5 (165)	8	0.75 (19)	NA	3.6 (92)
	3 (76)	1.25 (32)	6.62 (168)	8.25 (210)	8	0.88 (22)	2.58 (66)	5.0 (127)
DIN 2501 PN 10–40	DN 50	20 mm	125 mm	165 mm	4	18 mm	NA	4.0 (102)
DIN 2501 PN 25/40	DN 80	24 mm	160 mm	200 mm	8	18 mm	66 mm	5.4 (138)
	DN 100	24 mm	190 mm	235 mm	8	22 mm	89 mm	6.2 (158)
DIN 2501 PN 10/16	DN 100	20 mm	180 mm	220 mm	8	18 mm	89 mm	6.2 (158)

*Dimensions are in inches (millimeters)*

(1) Tolerance are 0.040 (1.02), - 0.020 (0.51)

Class <sup>(1)</sup>	Pipe Size	Process Side F	Lower Housing G		H
			<sup>1</sup> / <sub>4</sub> -in. NPT	<sup>1</sup> / <sub>2</sub> -in. NPT	
ASME B16.5 (ANSI) 150	2 (51)	2.12 (54)	0.97 (25)	1.31 (33)	5.65 (143)
	3 (76)	3.6 (91)	0.97 (25)	1.31 (33)	5.65 (143)
	4 (102)	3.6 (91)	0.97 (25)	1.31 (33)	5.65 (143)
ASME B16.5 (ANSI) 300	2 (51)	2.12 (54)	0.97 (25)	1.31 (33)	5.65 (143)
	3 (76)	3.6 (91)	0.97 (25)	1.31 (33)	5.65 (143)
	4 (102)	3.6 (91)	0.97 (25)	1.31 (33)	5.65 (143)
ASME B16.5 (ANSI) 600	2 (51)	2.12 (54)	0.97 (25)	1.31 (33)	7.65 (194)
	3 (76)	3.6 (91)	0.97 (25)	1.31 (33)	7.65 (194)
DIN 2501 PN 10–40	DN 50	2.4 (61)	0.97 (25)	1.31 (33)	5.65 (143)
DIN 2501 PN 25/40	DN 80	3.6 (91)	0.97 (25)	1.31 (33)	5.65 (143)
	DN 100	3.6 (91)	0.97 (25)	1.31 (33)	5.65 (143)
DIN 2501 PN 10/16	DN 100	3.6 (91)	0.97 (25)	1.31 (33)	5.65 (143)

(1) Tolerances are 0.040 (1.02), -0.020 (0.51).

# Product Data Sheet

00813-0100-4001, Rev LA

November 2010

# Rosemount 3051

## OPTIONS

### Standard Configuration

Unless otherwise specified, transmitter is shipped as follows:

ENGINEERING UNITS	
<b>Differential/Gage:</b>	inH <sub>2</sub> O (Range 0, 1, 2, and 3) psi (Range 4 and 5)
<b>Absolute/3051TA:</b>	psi (all ranges)
<b>4 mA (1 V dc)<sup>(1)</sup>:</b>	0 (engineering units above)
<b>20 mA (5 V dc)<sup>(1)</sup>:</b>	Upper range limit
<b>Output:</b>	Linear
<b>Flange type:</b>	Specified model code option
<b>Flange material:</b>	Specified model code option
<b>O-ring material:</b>	Specified model code option
<b>Drain/vent:</b>	Specified model code option
<b>LCD Display:</b>	Installed or none
<b>Alarm<sup>(1)</sup>:</b>	High
<b>Software tag:</b>	(Blank)

(1) Not applicable to FOUNDATION fieldbus or Profibus PA.

### Custom Configuration<sup>(1)</sup>

If Option Code C1 is ordered, the customer may specify the following data in addition to the standard configuration parameters.

- Output Information
- Transmitter Information
- LCD display Configuration
- Hardware Selectable Information
- Signal Selection

Refer to the "Rosemount 3051 Configuration Data Sheet" document number 00806-0100-4001.

### Tagging (3 options available)

- Standard SST hardware tag is wired to the transmitter. Tag character height is 0.125 in. (3,18 mm), 56 characters maximum.
- Tag may be permanently stamped on transmitter nameplate upon request, 56 characters maximum.
- Tag may be stored in transmitter memory (30 characters maximum). Software tag is left blank unless specified.

### Commissioning Tag<sup>(2)</sup>

A temporary commissioning tag is attached to all transmitters. The tag indicates the device ID and allows an area for writing the location.

### Optional Rosemount 304, 305 or 306 Integral Manifolds

Factory assembled to 3051C and 3051T transmitters. Refer to the following Product Data Sheet (document number 00813-0100-4839 for Rosemount 304 and 00813-0100-4733 for Rosemount 305 and 306) for additional information.

(1) Not applicable to FOUNDATION fieldbus or Profibus PA protocols.

(2) Only applicable to FOUNDATION fieldbus.

### Other Seals

Refer to Product Data Sheet 00813-0100-4016 for additional information.

### Output Information

Output range points must be the same unit of measure. Available units of measure include:

Pressure			
atm	inH <sub>2</sub> O@4 °C <sup>(1)</sup>	g/cm <sup>2</sup>	psi
mbar	mmH <sub>2</sub> O	kg/cm <sup>2</sup>	torr
bar	mmHg	Pa	
inH <sub>2</sub> O	mmH <sub>2</sub> O@4 °C <sup>(1)</sup>	kPa	
inHg	ftH <sub>2</sub> O	MPa <sup>(2)</sup>	
Flow <sup>(2)(3)</sup>			
bbbl	kg	cm <sup>3</sup>	
ft <sup>3</sup>	lb	m <sup>3</sup>	
gal	L	ton	
Level <sup>(2)</sup>			
%	ft	cm	
in	mm		

(1) Only available on 4-20mA HART.

(2) Only available on Profibus PA.

(3) All flow units are available per second, minute, hour or day.

### Display and Interface options

#### M4 Digital Display with Local Operator Interface (LOI)

- Available for Profibus PA
- Commission the device with external Local Configuration Buttons
- LOI Menu includes: Address, Units, Calibration, Damping, Display, Identification Number

#### M5 Digital Display

- 2-Line, 5-Digit LCD for 4-20 mA HART
- 1-Line, 4-Digit LCD for 1-5 Vdc HART Low Power
- 2-Line, 8-Digit LCD for FOUNDATION fieldbus and Profibus PA
- Direct reading of digital data for higher accuracy
- Displays user-defined flow, level, volume, or pressure units
- Displays diagnostic messages for local troubleshooting
- 90-degree rotation capability for easy viewing

#### M6 Digital Display with 316 Stainless Steel Cover

- For use with stainless steel housing option (housing codes J, K, and L)

### Hardware Adjustments<sup>(1)</sup>

4-20 mA HART and 1-5 Vdc HART Low Power transmitters ship with local span and zero adjustments standard unless otherwise specified.

- Non-interactive external zero and span adjustments ease calibration
- Magnetic switches replace standard potentiometer adjustments to optimize performance

#### J1 Local Zero Adjustment Only<sup>(1)</sup>

#### J3 No Local Zero or Span Adjustment<sup>(1)</sup>

### Transient Protection

T1 Integral Transient Protection Terminal Block

Meets IEEE C62.41, Category Location B

6 kV crest (0.5  $\mu$ s - 100 kHz)

3 kV crest (8  $\times$  20 microseconds)

6 kV crest (1.2  $\times$  50 microseconds)

### Bolts for Flanges and Adapters

- Options permit bolts for flanges and adapters to be obtained in various materials

- Standard material is plated carbon steel per ASTM A449, Type 1

L4 Austenitic 316 Stainless Steel Bolts

L5 ASTM A 193, Grade B7M Bolts

L6 Alloy K-500 Bolts

### Conduit Plug

DO 316 SST Conduit Plug

Single 316 SST conduit plug replaces carbon steel plug

### Rosemount 3051C Coplanar Flange and 3051T Bracket Option

B4 Bracket for 2-in. Pipe or Panel Mounting

- For use with the standard Coplanar flange configuration
- Bracket for mounting of transmitter on 2-in. pipe or panel
- Stainless steel construction with stainless steel bolts

### Rosemount 3051C Traditional Flange Bracket Options

B1 Bracket for 2-in. Pipe Mounting

- For use with the traditional flange option
- Bracket for mounting on 2-in. pipe
- Carbon steel construction with carbon steel bolts
- Coated with polyurethane paint

B2 Bracket for Panel Mounting

- For use with the traditional flange option
- Bracket for mounting transmitter on wall or panel
- Carbon steel construction with carbon steel bolts
- Coated with polyurethane paint

B3 Flat Bracket for 2-in. Pipe Mounting

- For use with the traditional flange option
- Bracket for vertical mounting of transmitter on 2-in. pipe
- Carbon steel construction with carbon steel bolts
- Coated with polyurethane paint

B7 B1 Bracket with SST Bolts

- Same bracket as the B1 option with Series 300 stainless steel bolts

B8 B2 Bracket with SST Bolts

- Same bracket as the B2 option with Series 300 stainless steel bolts

B9 B3 Bracket with SST Bolts

- Same bracket as the B3 option with Series 300 stainless steel bolts

BA Stainless Steel B1 Bracket with SST Bolts

- B1 bracket in stainless steel with Series 300 stainless steel bolts

BC Stainless Steel B3 Bracket with SST Bolts

- B3 bracket in stainless steel with Series 300 stainless steel bolts

Standard Terms and Conditions of Sale can be found at [www.rosemount.com/terms\\_of\\_sale](http://www.rosemount.com/terms_of_sale)

The Emerson logo is a trade mark and service mark of Emerson Electric Co.

Rosemount, Annubar, ProPlate, and the Rosemount logotype are registered trademarks of Rosemount Inc.

PlantWeb is a registered trademark of one of the Emerson Process Management group of companies.

Instrument Toolkit is a registered trademark of Emerson Process Management.

Complete Point Solutions, Coplanar and Multivariable are trademarks of Rosemount Inc.

HART is a registered trademark of the HART Communications Foundation.

Syltherm 800, Dow Corning, and D.C. are registered trademarks of Dow Corning Co.

Neobee M-20 is a registered trademark of Stephan Chemical Co.

The 3-A symbol is a registered trademark of the 3-A Sanitary Standards Symbol Council.

FOUNDATION fieldbus is a registered trademark of the Fieldbus Foundation.

Fluorinert is a registered trademark of 3M Company.

© 2010 Rosemount, Inc. All rights reserved.

All other marks are the property of their respective owners.

### Emerson Process Management

#### Rosemount Inc.

8200 Market Boulevard  
Chanhassen, MN 55317 USA  
T (U.S.) 1 800 999 9307  
T (International) (952) 906 8888  
F (952) 949 7001

[www.rosemount.com](http://www.rosemount.com)

#### Emerson Process Management Emerson Process Management Asia

Heath Place  
Bognor Regis  
West Sussex PO22 9SH  
England  
T 44 (0) 1243 863121  
F 44 (0) 1243 867554

#### Pacific Private Limited

1 Pandan Crescent  
Singapore 128461  
T (65) 6777 8211  
F (65) 6777 0947  
Enquiries@AP.EmersonProcess.com



**EMERSON**  
Process Management